


TOSHIBA

FILE NO. 050-200613GR
(MFR'S VERSION A)

SERVICE MANUAL

COLOR TELEVISION

19A26C

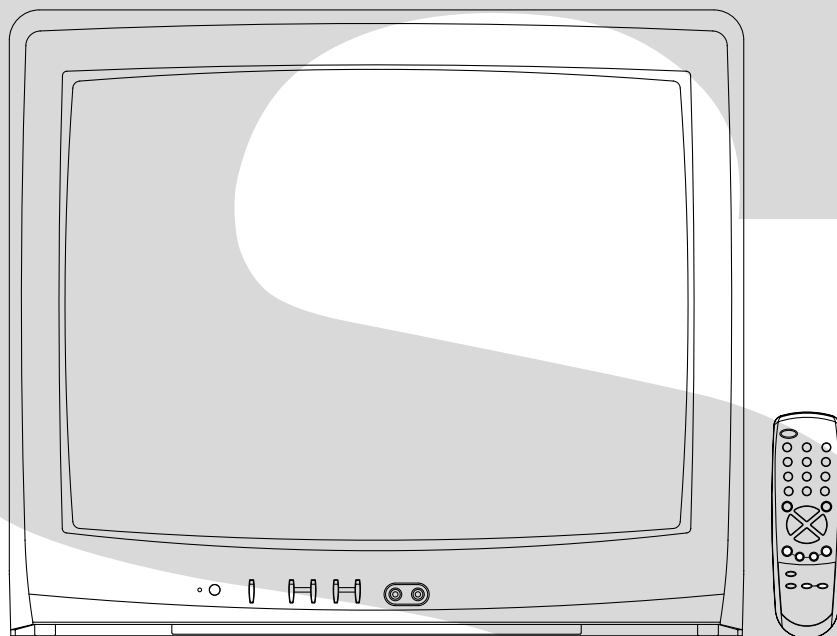

The above model is classified as a green product (*1), as indicated by the underlined serial number. This Service Manual describes replacement parts for the green product. When repairing this green product, use the part(s) described in this manual and lead-free solder (*2).

For (*1) and (*2), see the next page.

(*1)

GREEN PRODUCT PROCUREMENT

The EC is actively promoting the WEEE & RoHS Directives that define standards for recycling and reuse of Waste Electrical and Electronic Equipment and for the Restriction of the use of certain Hazardous Substances. From July 1, 2006, the RoHS Directive will prohibit any marketing of new products containing the restricted substances.

Increasing attention is given to issues related to the global environmental. Toshiba Corporation recognizes environmental protection as a key management tasks, and is doing its utmost to enhance and improve the quality and scope of its environmental activities. In line with this, Toshiba proactively promotes Green Procurement, and seeks to purchase and use products, parts and materials that have low environmental impacts.

Green procurement of parts is not only confined to manufacture. The same green parts used in manufacture must also be used as replacement parts.

(*2)

LEAD-FREE SOLDER

This product is manufactured using lead-free solder as a part of a movement within the consumer products industry at large to be environmentally responsible. Lead-free solder must be used in the servicing and repair of this product.

WARNING

This product is manufactured using lead free solder.

DO NOT USE LEAD BASED SOLDER TO REPAIR THIS PRODUCT !

The melting temperature of lead-free solder is higher than that of leaded solder by 86°F to 104°F (30°C to 40°C). Use of a soldering iron designed for lead-based solders to repair product made with lead-free solder may result in damage to the component and or PCB being soldered. Great care should be made to ensure high-quality soldering when servicing this product — especially when soldering large components, through-hole pins, and on PCBs — as the level of heat required to melt lead-free solder is high.

SERVICING NOTICES ON CHECKING

1. KEEP THE NOTICES

As for the places which need special attentions, they are indicated with the labels or seals on the cabinet, chassis and parts. Make sure to keep the indications and notices in the operation manual.

2. AVOID AN ELECTRIC SHOCK

There is a high voltage part inside. Avoid an electric shock while the electric current is flowing.

3. USE THE DESIGNATED PARTS

The parts in this equipment have the specific characters of incombustibility and withstand voltage for safety. Therefore, the part which is replaced should be used the part which has the same character.

Especially as to the important parts for safety which is indicated in the circuit diagram or the table of parts as a  mark, the designated parts must be used.

4. PUT PARTS AND WIRES IN THE ORIGINAL POSITION AFTER ASSEMBLING OR WIRING

There are parts which use the insulation material such as a tube or tape for safety, or which are assembled in the condition that these do not contact with the printed board. The inside wiring is designed not to get closer to the pyrogenic parts and high voltage parts. Therefore, put these parts in the original positions.

5. TAKE CARE TO DEAL WITH THE CATHODE-RAY TUBE

In the condition that an explosion-proof cathode-ray tube is set in this equipment, safety is secured against implosion. However, when removing it or serving from backward, it is dangerous to give a shock. Take enough care to deal with it.

6. AVOID AN X-RAY

Safety is secured against an X-ray by considering about the cathode-ray tube and the high voltage peripheral circuit, etc.

Therefore, when repairing the high voltage peripheral circuit, use the designated parts and make sure not modify the circuit.

Repairing except indicates causes rising of high voltage, and it emits an X-ray from the cathode-ray tube.

7. PERFORM A SAFETY CHECK AFTER SERVICING

Confirm that the screws, parts and wiring which were removed in order to service are put in the original positions, or whether there are the portions which are deteriorated around the serviced places serviced or not. Check the insulation between the antenna terminal or external metal and the AC cord plug blades. And be sure the safety of that.

(INSULATION CHECK PROCEDURE)

1. Unplug the plug from the AC outlet.
2. Remove the antenna terminal on TV and turn on the TV.
3. Insulation resistance between the cord plug terminals and the external exposure metal **[Note 2]** should be more than 1M ohm by using the 500V insulation resistance meter **[Note 1]**.
4. If the insulation resistance is less than 1M ohm, the inspection repair should be required.

[Note 1]

If you have not the 500V insulation resistance meter, use a Tester.

[Note 2]

External exposure metal: Antenna terminal
Headphone jack

HOW TO ORDER PARTS

Please include the following informations when you order parts. (Particularly the VERSION LETTER.)

1. MODEL NUMBER and VERSION LETTER

The MODEL NUMBER can be found on the back of each product and the VERSION LETTER can be found at the end of the SERIAL NUMBER.

2. PART NO. and DESCRIPTION

You can find it in your SERVICE MANUAL.

IMPORTANT

When you exchange IC and Transistor with a heat sink, apply silicon grease on the contact section of the heat sink. Before applying new silicon grease, remove all the old silicon grease. (Old grease may cause damages to the IC and Transistor.)

TABLE OF CONTENTS

GREEN PRODUCT PROCUREMENT	A1-1
LEAD-FREE SOLDER	A1-1
SERVICING NOTICES ON CHECKING	A1-2
HOW TO ORDER PARTS	A1-2
IMPORTANT	A1-2
TABLE OF CONTENTS	A2-1
GENERAL SPECIFICATIONS	A3-1~A3-5
DISASSEMBLY INSTRUCTIONS	
1.REMOVAL OF ANODE CAP	B1-1
2.REMOVAL AND INSTALLATION OF FLAT PACKAGE IC	B2-1, B2-2
SERVICE MODE LIST	C-1
CONFIRMATION OF HOURS USED	C-1
WHEN REPLACING EEPROM (MEMORY) IC	C-1
ELECTRICAL ADJUSTMENTS	D-1~D-5
BLOCK DIAGRAM	E-1, E-2
PRINTED CIRCUIT BOARDS	
MAIN/CRT	F-1~F-4
SCHEMATIC DIAGRAMS	
MICON/CHROMA/TUNER	G-1, G-2
TV POWER	G-3, G-4
DEFLECTION/CRT	G-5, G-6
SOUND/AV	G-7, G-8
WAVEFORMS	H-1, H-2
MECHANICAL EXPLODED VIEW	I-1, I-2
MECHANICAL REPLACEMENT PARTS LIST	J1-1
ELECTRICAL REPLACEMENT PARTS LIST	J2-1~J2-3

GENERAL SPECIFICATIONS

G-1	TV System	CRT	CRT Size / Visual Size	19 inch / 480.0mmV
			CRT Type	Normal
			Magnetic Field BV/BH	+0.45G/0.18G
		Color System		NTSC
		Speaker		1Speaker
			Position	Bottom
			Size	3 Inch
			Impedance	8 ohm
		Sound Output	MAX	1.5 W
			10%(Typical)	--- W
G-2	Tuning System	NTSC3.58+4.43 /PAL60Hz		No
		Broadcasting System		US System M
		Tuner and	System	1Tuner
		Receive CH	Destination	USA(W/ CATV)
			CH Coverage	2 - 69, 4A, A-5 - A-1, A - I, J - W, W+1 - W+84
		Intermediate	Picture(FP)	45.75MHz
		Frequency	Sound(FS)	41.25MHz
			FP-FS	4.50MHz
		Preset CH		No
		Stereo/Dual TV Sound		No
G-3	Power	Power Source	AC	120V AC 60Hz
			DC	
		Power Consumption	at AC	73 W at AC 120 V 60 Hz
			Stand by (at AC)	3 W at AC 120 V 60 Hz
			Per Year	-- kWh/Year
G-4	Regulation	Protector	Power Fuse	Yes
			Safety	CSA
			Radiation	IC
			X-Radiation	HWC
G-5	Temperature		Operation	+5oC ~ +40oC
			Storage	-20oC ~ +60oC
G-6	Operating Humidity			Less than 80% RH

GENERAL SPECIFICATIONS

G-7	On Screen Display	Menu		Yes
		Menu Type		Character
		Picture		Yes
		Contrast		Yes
		Brightness		Yes
		Color		Yes
		Tint		Yes
		Sharpness		Yes
		Audio		No
		Bass		No
		Treble		No
		Balance		No
		BBE On/Off		No
		Stable Sound On/Off		No
		CH Set Up		Yes
		TV/CABLE(CATV)		Yes
		Auto CH Memory		Yes
		Add/ Delete		Yes
		Language		Yes
		V-chip		No
		Lock		Yes
		On Timer		Yes
		CH Label		No
		Favorite CH		No
		Color Stream DVD/DTV		No
		Control Level		Yes
		Volume		Yes
		Brightness		Yes
		Contrast		Yes
		Color		Yes
		Tint		Yes
		Sharpness		Yes
		Tuning		No
		Bass		No
		Treble		No
		Balance		No
		Back Light		No
		Stereo,Audio Output,SAP		No
		Video		Yes
		Color Stream		No
		Channel(TV/Cable)		Yes
		CH Label		No
		Game Timer		Yes
		Sleep Timer		Yes
		Sound Mute		Yes
		V-chip Rating		No
G-8	OSD Language			English French Spanish
G-9	Clock and Timer	Sleep Timer	Max Time	120 Min
			Step	<u> 10 </u> Min
		On Timer	Program(On Timer)	Yes
		Wake Up Timer		<u> No </u>
		Timer Back-up (at Power Off Mode)	more than	-- Min Sec

GENERAL SPECIFICATIONS

G-10	Remote Control	Unit	RC-EH
		Glow in Dark Remocon	Yes
		Format	Toshiba
		Custom Code	40-BF h
		Power Source	3V
		Voltage(D.C)	UM-4 x 2 pcs
		UM size x pcs	
		Total Keys	27 Keys
		Keys	
		Power	Yes
		1	Yes
		2	Yes
		3	Yes
		4	Yes
		5	Yes
		6	Yes
		7	Yes
		8	Yes
		9	Yes
		0	Yes
		100	No
		CH Up	Yes
		CH Down	Yes
		Volume Up	Yes
		Volume Down	Yes
		TV/Caption/Text	Yes
		CH1/CH2	Yes
		TV/Video(TV/AV)	Yes
		CH RTN/CH ENT(Quick View)	Yes
		Sleep	Yes
		RE Call(Call)	Yes
		Reset	Yes
		Menu	Yes
		Enter	Yes
		Mute	Yes
		Exit	No
		MTS(Audio Select)	No
		Set +	Yes
		Set -	Yes
		Multi Brand Keys	
		CH Up(VCR)	No
		CH Down(VCR)	No
		Pause/Still	No
		TV/VCR(VCR)	No
		Code	No
		FF	No
		Rew	No
		Rec	No
		Play	No
		Stop	No
		TV	No
		VCR	No
		Cable	No

GENERAL SPECIFICATIONS

G-11	Features	Auto Degauss	Yes
		Auto Shut Off	Yes
		Canal+	No
		CATV	Yes
		Anti-theft	No
		Rental	No
		Memory(Last CH)	Yes
		Memory(Last Volume)	Yes
		V-Chip	No
		Type	--- Type
		BBE	No
		Auto Search	No
		CH Allocation	No
		SAP	No
		Just Clock Function	No
		CH Label	No
		VM Circuit	No
		Full OSD	No
		Premiere	No
		Comb Filter	No
			Lines
		Auto CH Memory	Yes
		Hotel Lock	No
		Closed Caption	Yes
		Stable Sound	No
		FBT Leak Test Protect	Yes
		CH Lock	Yes
		Video Lock	Yes
		Game Timer (Max Time:120 Min)	Yes
		Stable Sound	No
		Energy Star	No
		Power On Memory	Yes
		Favorite CH	No
G-12	Accessories	Owner's Manual	Language
			W/ Warranty
		Remote Control Unit	English / French
		Rod Antenna	Yes
			No
			Poles
			Terminal
		Loop Antenna	No
			Terminal
		U/V Mixer	No
		DC Car Cord (Center+)	No
		Guarantee Card	No
		Warning Sheet	No
		Circuit Diagram	No
		Antenna Change Plug	No
		Service Facility List	No
		Important Safety Instruction	No
		Dew/AHC Caution Sheet	No
		AC Plug Adapter	No
		Quick Set-up Sheet	No
		Battery	Yes
			UM4 x 2
		UM size x pcs	No
		OEM Brand	No
		AC Cord	No
		AV Cord (2Pin-1Pin)	No
		Registration Card (NDL Card)	No
		ESP Card	No
		PTB Sheet	No
		300 ohm to 75 ohm Antenna Adapter	No

GENERAL SPECIFICATIONS

G-13	Interface	Switch	Front	Power	Yes
				System Select	No
				Main Power SW	No
				Sub Power	No
				Channel Up/Reset	Yes
				Channel Down/Enter	Yes
				Volume Up/Set Up	Yes
				Volume Down/Set Down	Yes
				MENU=Volume Up+Volume Down	Yes
		Rear	AC/DC	No	
			TV/CATV Selector	No	
			Degauss	No	
			Main Power SW	No	
		Indicator	Power	Yes	
			Stand-by	No	
			On Timer	No	
		Terminals	Front	Video Input	RCA RCA x 1
				Audio Input	
				Other Terminal	
			Rear	Video Input(Rear1)	No
				Video Input(Rear2)	No
				Audio Input(Rear1)	No
				Audio Input(Rear2)	No
				Video Output	No
				Audio Output	No
				Euro Scart	No
				Color Stream	No
				Diversity	No
				Ext Speaker	No
				DC Jack 12V(Center +)	No
				VHF/UHF Antenna Input	F Type
				AC Outlet	No
G-14	Set Size	Approx. W x D x H (mm)		488 x 465 x 416	
G-15	Weight	Net (Approx.)		17.5kg (38.6 lbs)	
		Gross (Approx.)		20.0kg (44.1lbs)	
G-16	Carton	Master Carton		No	
			Content	--- Sets	
			Material	-- /--	
			Dimensions W x D x H(mm)	-- x -- x --	
			Description of Origin	No	
		Gift Box	Material	Double/Brown	
			Dimensions W x D x H(mm)	546 x 526 x 472	
			Description of Origin	Yes	
		Drop Test		Natural Dropping At 1 Corner / 2 Edges / 4 Surfaces	
			Height (cm)	60 (ORION SPEC:46)	
G-17	Cabinet Material	Cabinet	Container Stuffing	436 Sets/40' container	
			Cabinet Front	PS 94V0 DECABROM	
			Cabinet Rear	PS 94V0 DECABROM	
		PCB	Non-Halogen Demand	No	
			Eyelet Demand	Yes	
G-18	Environment	Environmental standard requirement (by buyer)		Green procurement of TOSHIBA	
		Pb-free		Phase3(Ph	

DISASSEMBLY INSTRUCTIONS

1. REMOVAL OF ANODE CAP

Read the following **NOTED** items before starting work.

- * After turning the power off there might still be a potential voltage that is very dangerous. When removing the Anode Cap, make sure to discharge the Anode Cap's potential voltage.
- * Do not use pliers to loosen or tighten the Anode Cap terminal, this may cause the spring to be damaged.

REMOVAL

1. Follow the steps as follows to discharge the Anode Cap.
(Refer to Fig. 1-1.)

Connect one end of an Alligator Clip to the metal part of a flat-blade screwdriver and the other end to ground. While holding the plastic part of the insulated Screwdriver, touch the support of the Anode with the tip of the Screwdriver. A cracking noise will be heard as the voltage is discharged.

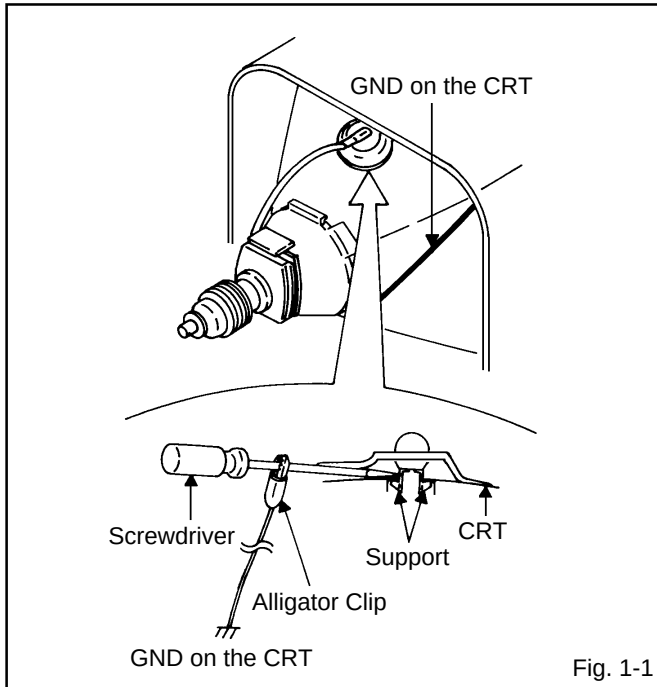


Fig. 1-1

2. Flip up the sides of the Rubber Cap in the direction of the arrow and remove one side of the support.
(Refer to Fig. 1-2.)

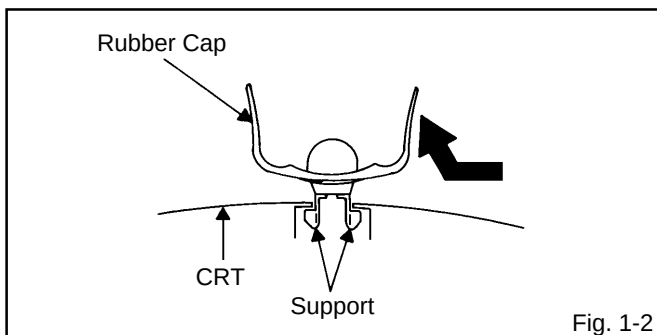


Fig. 1-2

3. After one side is removed, pull in the opposite direction to remove the other.

NOTE

Take care not to damage the Rubber Cap.

INSTALLATION

1. Clean the spot where the cap was located with a small amount of alcohol. (Refer to Fig. 1-3.)

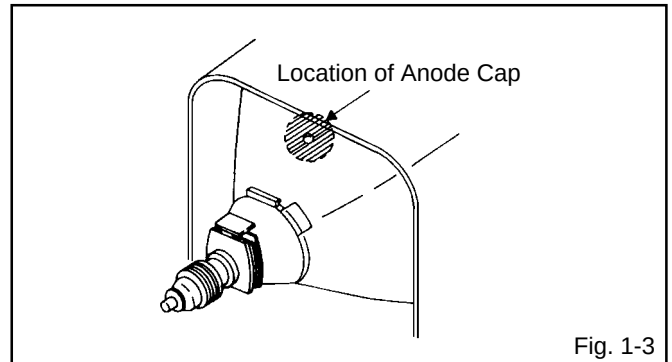


Fig. 1-3

NOTE

Confirm that there is no dirt, dust, etc. at the spot where the cap was located.

2. Arrange the wire of the Anode Cap and make sure the wire is not twisted.
3. Turn over the Rubber Cap. (Refer to Fig. 1-4.)

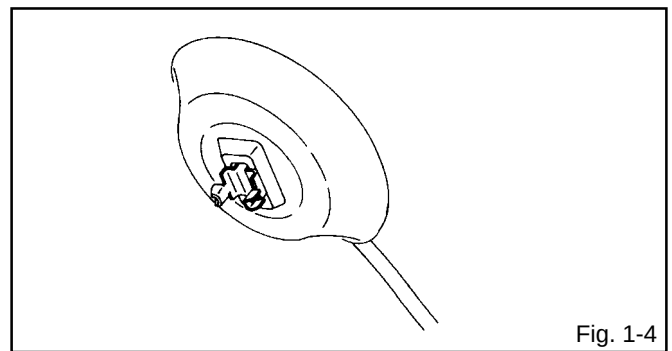


Fig. 1-4

4. Insert one end of the Anode Support into the anode button, then the other as shown in Fig. 1-5.

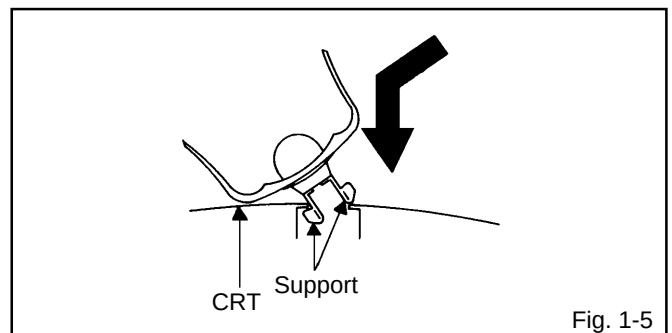


Fig. 1-5

5. Confirm that the Support is securely connected.
6. Put on the Rubber Cap without moving any parts.

DISASSEMBLY INSTRUCTIONS


2. REMOVAL AND INSTALLATION OF FLAT PACKAGE IC

REMOVAL

1. Put the Masking Tape (cotton tape) around the Flat Package IC to protect other parts from any damage. (Refer to Fig. 2-1.)

NOTE


Masking is carried out on all the parts located within 10 mm distance from IC leads.

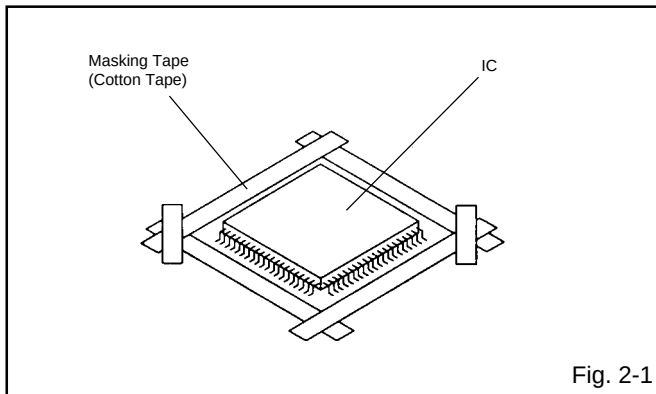

2. Heat the IC leads using a blower type IC desoldering machine. (Refer to Fig. 2-2.)

NOTE


Do not add the rotating and the back and forth directions force on the IC, until IC can move back and forth easily after desoldering the IC leads completely.

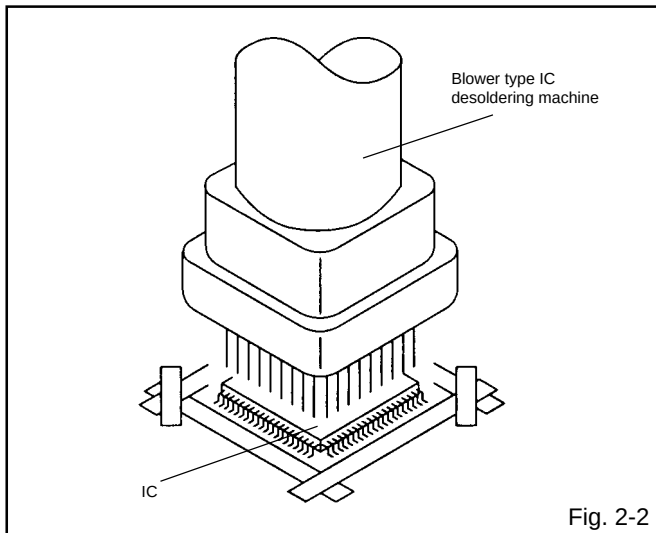

3. When IC starts moving back and forth easily after desoldering completely, pickup the corner of the IC using a tweezers and remove the IC by moving with the IC desoldering machine. (Refer to Fig. 2-3.)

NOTE

Some ICs on the PCB are affixed with glue, so be careful not to break or damage the foil of each IC leads or solder lands under the IC when removing it.

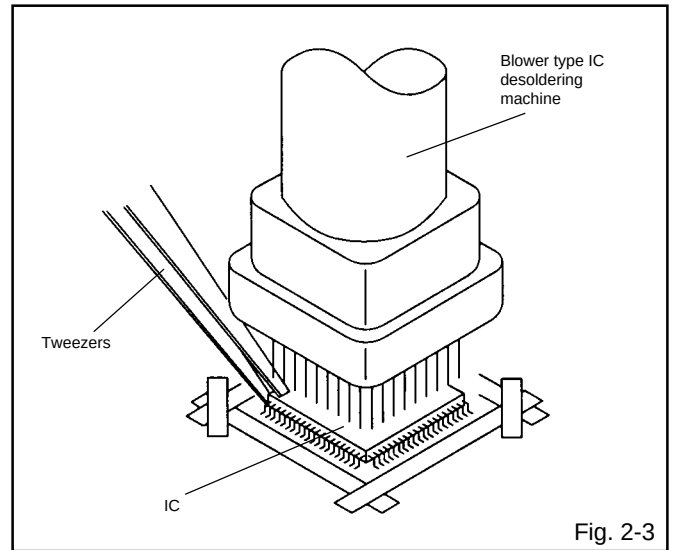


4. Peel off the Masking Tape.

5. Absorb the solder left on the pattern using the Braided Shield Wire. (Refer to Fig. 2-4.)

NOTE


Do not move the Braided Shield Wire in the vertical direction towards the IC pattern.

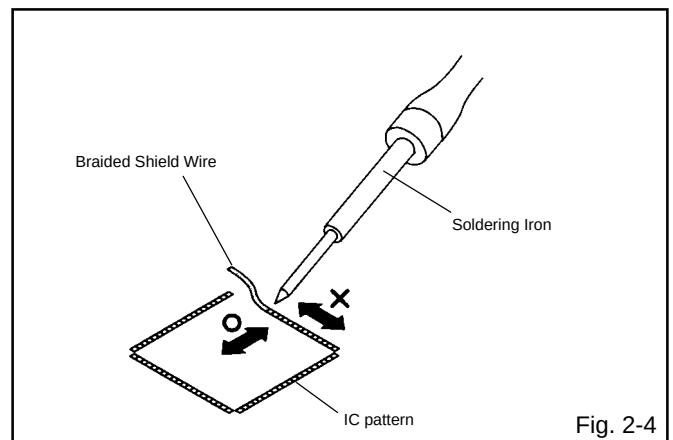


DISASSEMBLY INSTRUCTIONS

INSTALLATION

1. Take care of the polarity of new IC and then install the new IC fitting on the printed circuit pattern. Then solder each lead on the diagonal positions of IC temporarily. (Refer to Fig. 2-5.)

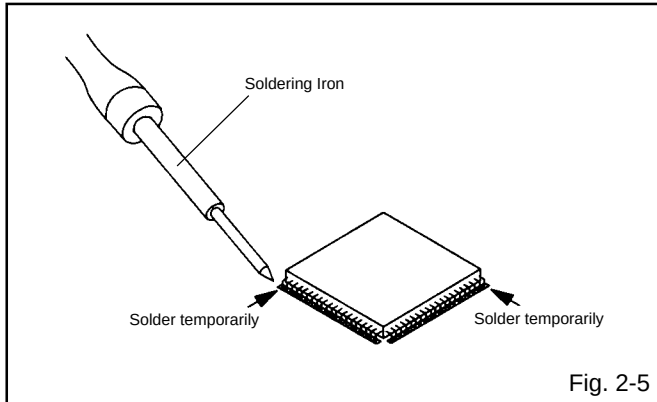


2. Supply the solder from the upper position of IC leads sliding to the lower position of the IC leads. (Refer to Fig. 2-6.)

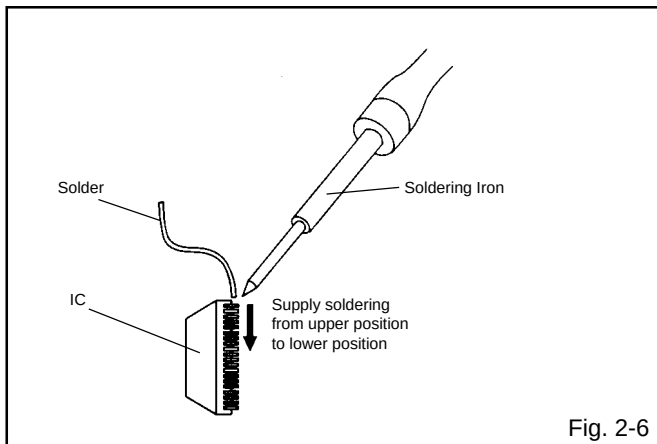


3. Absorb the solder left on the lead using the Braided Shield Wire. (Refer to Fig. 2-7.)

NOTE

Do not absorb the solder to excess.

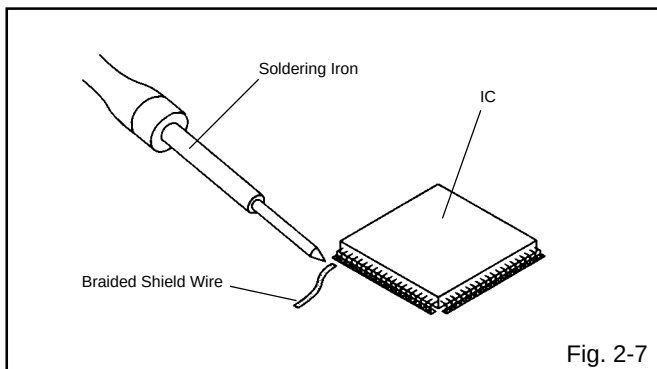

4. When bridge-soldering between terminals and/or the soldering amount are not enough, resolder using a Thin-tip Soldering Iron. (Refer to Fig. 2-8.)

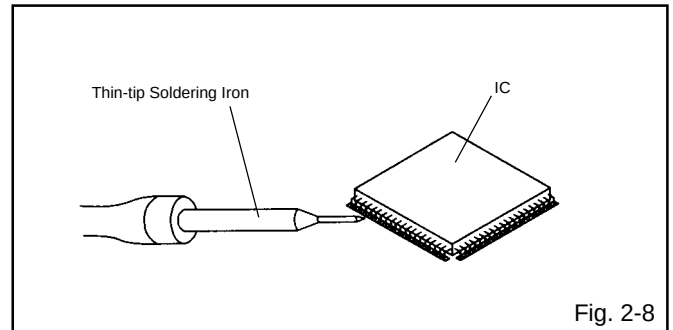

5. Finally, confirm the soldering status on four sides of the IC using a magnifying glass. Confirm that no abnormality is found on the soldering position and installation position of the parts around the IC. If some abnormality is found, correct by resoldering.

NOTE

When the IC leads are bent during soldering and/or repairing, do not repair the bending of leads. If the bending of leads are repaired, the pattern may be damaged. So, always be sure to replace the IC in this case.

SERVICE MODE LIST

This unit is provided with the following SERVICE MODES so you can repair, examine and adjust easily.
To enter the Service Mode, press both set key and remote control key for more than 2 seconds.

Set Key	Remocon Key	Operations
VOL. (-) MIN	0	Releasing of V-CHIP PASSWORD.
VOL. (-) MIN	1	Initialization of factory data. NOTE: Do not use this for normal servicing. If you set factory initialization, the memories are reset such as the clock setting, the channel setting, the POWER ON total hours.
VOL. (-) MIN	6	POWER ON total hours is displayed on the screen. Refer to the "CONFIRMATION OF HOURS USED". Can be checked of the INITIAL DATA of MEMORY IC. Refer to the "WHEN REPLACING EEPROM (MEMORY) IC".
VOL. (-) MIN	9	Display of the Adjustment MENU on the screen. Refer to the "ELECTRICAL ADJUSTMENT" (On-Screen Display Adjustment).

CONFIRMATION OF HOURS USED

POWER ON total hours can be checked on the screen. Total hours are displayed in 16 system of notation.

NOTE: If you set factory initialization, the total hours is reset to "0".

1. Set the VOLUME to minimum.
2. Press both VOL. DOWN button on the set and Channel button **(6)** on the remote control for more than 2 seconds.
3. After the confirmation of using hours, turn off the power.

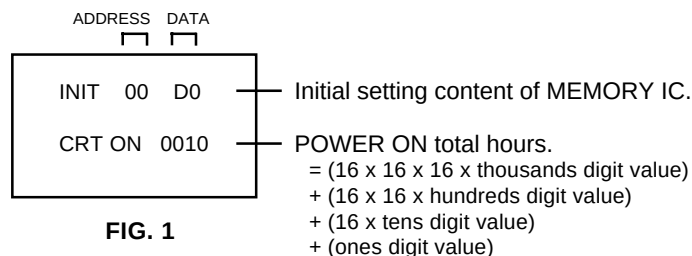


FIG. 1

WHEN REPLACING EEPROM (MEMORY) IC

If a service repair is undertaken where it has been required to change the MEMORY IC, the following steps should be taken to ensure correct data settings while making reference to TABLE 1.

INI	+0	+1	+2	+3	+4	+5	+6	+7	+8	+9	+A	+B	+C	+D	+E	+F
00	D0	04	EB	4E	57	B3	24	69	38	00	00	05	90	D0	00	07

Table 1

1. Enter DATA SET mode by setting VOLUME to minimum.
2. While holding down VOLUME button on front cabinet, press key **(6)** on remote control for more than 2 seconds. ADDRESS and DATA should appear as FIG 1.
3. ADDRESS is now selected and should "blink". Using the VOL. +/- button on the remote, step through the ADDRESS until required ADDRESS to be changed is reached.
4. Press ENTER to select DATA. When DATA is selected, it will "blink".
5. Again, step through the DATA using VOL. +/- button until required DATA value has been selected.
6. Pressing ENTER will take you back to ADDRESS for further selection if necessary.
7. Repeat steps 3 to 6 until all data has been checked.
8. When satisfied correct DATA has been entered, turn POWER off (return to STANDBY MODE) to finish DATA input.

After the data input, set to the initializing of shipping.

9. Turn POWER on.
10. While holding down VOLUME button on front cabinet, press key **(1)** on remote control for more than 2 seconds.
11. After the finishing of the initializing of shipping, the unit will turn off automatically.

The unit will now have the correct DATA for the new MEMORY IC.

ELECTRICAL ADJUSTMENTS

1. BEFORE MAKING ELECTRICAL ADJUSTMENTS

Read and perform these adjustments when repairing the circuits or replacing electrical parts or PCB assemblies.

CAUTION


- Use an isolation transformer when performing any service on this chassis.
- Before removing the anode cap, discharge electricity because it contains high voltage.
- When removing a PCB or related component, after unfastening or changing a wire, be sure to put the wire back in its original position.
- When you exchange IC and Transistor with a heat sink, apply silicon grease on the contact section of the heat sink. Before applying new silicon grease, remove all the old silicon grease. (Old grease may cause damages to the IC and Transistor.)

Prepare the following measurement tools for electrical adjustments.

1. Oscilloscope
2. Digital Voltmeter
3. Pattern Generator

On-Screen Display Adjustment

1. In the condition of NO indication on the screen. Press the VOL. DOWN button on the set and the Channel button **(9)** on the remote control for more than 2 seconds to appear the adjustment mode on the screen as shown in **Fig. 1-1**.

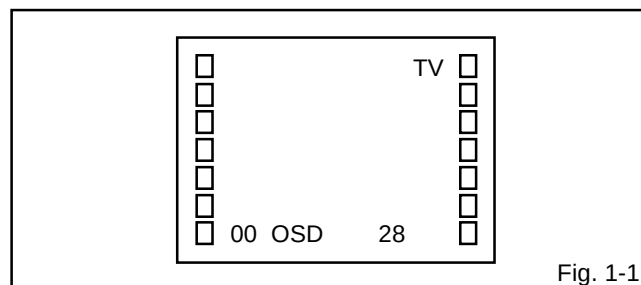

2. Use the Channel UP/DOWN button or Channel button **(0-9)** on the remote control to select the options shown in **Fig. 1-2**.
3. Press the MENU button on the remote control to end the adjustments.

NO.	FUNCTION	NO.	FUNCTION
00	OSD H	17	CONTRAST MAX
01	CUT OFF	18	CONTRAST MIN
04	H.VCO	19	COLOR CENT
05	H.PHASE	20	COLOR MAX
06	V.SIZE	21	COLOR MIN
07	V.SHIFT	22	TINT
08	R.DRIVE	23	SHARPNESS
09	B.DRIVE	24	FM LEVEL
10	R.BIAS	25	LEVEL
11	G.BIAS	26	SEPARATION 1
12	B.BIAS	27	SEPARATION 2
13	BRIGHT CENT	28	TEST MONO
14	BRIGHT MAX	29	TEST STEREO
15	BRIGHT MIN		
16	CONTRAST CENT		

Fig. 1-2

2. BASIC ADJUSTMENTS

2-1: CUT OFF

1. Place the set in AV MODE without signal.
2. Using the remote control, set the brightness and contrast to normal position.
3. Place the set in Aging Test for more than 15 minutes.
4. Activate the adjustment mode display of **Fig. 1-1** and press the channel button **(01)** on the remote control to select "CUT OFF".
5. Adjust the **Screen Volume** until a dim raster is obtained.

2-2: FOCUS

1. Receive the monoscope pattern.
2. Turn the Focus Volume fully counterclockwise once.
3. Adjust the **Focus Volume** until picture is distinct.

2-3: WHITE BALANCE

NOTE: Adjust after performing CUT OFF adjustment.

1. Place the set in Aging Test for more than 15 minutes.
2. Receive the white 100% signal from the Pattern Generator.
3. Using the remote control, set the brightness and contrast to normal position.
4. Activate the adjustment mode display of **Fig. 1-1** and press the channel button **(10)** on the remote control to select "R.BIAS".
5. Using the VOL. UP/DOWN button on the remote control, adjust the R.BIAS.
6. Press the CH. UP/DOWN button on the remote control to select the "R.DRIVE", "B.DRIVE", "G.BIAS" or "B.BIAS".
7. Using the VOL. UP/DOWN button on the remote control, adjust the R.DRIVE, B.DRIVE, G.BIAS or B.BIAS.
8. Perform the above adjustments 6 and 7 until the white color is achieved.

2-4: VERTICAL SIZE

1. Receive the monoscope pattern from the Pattern Generator.
2. Activate the adjustment mode display of **Fig. 1-1** and press the channel button **(06)** on the remote control to select "V.SIZE".
3. Press the VOL. UP/DOWN button on the remote control until the SHIFT quantity of the OVER SCAN on upside and downside becomes $10 \pm 1\%$.
4. Receive a broadcast and check if the picture is normal.

ELECTRICAL ADJUSTMENTS

2-5: TINT

1. Receive the color bar pattern.(RF Input)
2. Connect the oscilloscope to **TP023**.
3. Activate the adjustment mode display of **Fig. 1-1** and press the channel button **(22)** on the remote control to select "TINT".
4. Press the VOL. UP/DOWN button on the remote control until the section "A" becomes as straight line.
(Refer to Fig. 2-1)
5. Receive the color bar pattern. (Audio Video Input)
6. Press the TV/AV button on the remote control to set to the AV mode. Then perform the above adjustments 2~4.

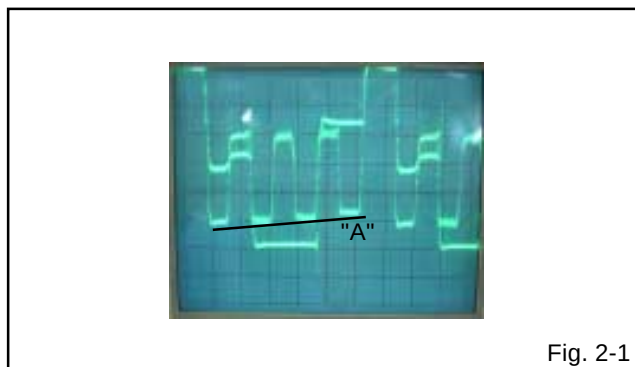


Fig. 2-1

2-6: COLOR CENT

1. Receive the color bar pattern. (RF Input)
2. Using the remote control, set the brightness, contrast, color, and tint to normal position.
3. Connect the oscilloscope to **TP022**.
4. Activate the adjustment mode display of **Fig. 1-1** and press the channel button **(19)** on the remote control to select "COLOR CENT".
5. Adjust the VOLTS RANGE VARIABLE knob of the oscilloscope until the range between white 100% and 0% is set to 4 scales on the screen of the oscilloscope.
6. Press the VOL. UP/DOWN button on the remote control until the red color level is adjusted to $110 \pm 10\%$ of the white level. **(Refer to Fig. 2-2)**
7. Receive the color bar pattern. (Audio Video Input)
8. Press the TV/AV button on the remote control to set to the AV mode. Then perform the above adjustments 2~5.
9. Press the VOL. UP/DOWN button on the remote control until the red color level is adjusted to $110 \pm 10\%$ of the white level. **(Refer to Fig. 2-2)**

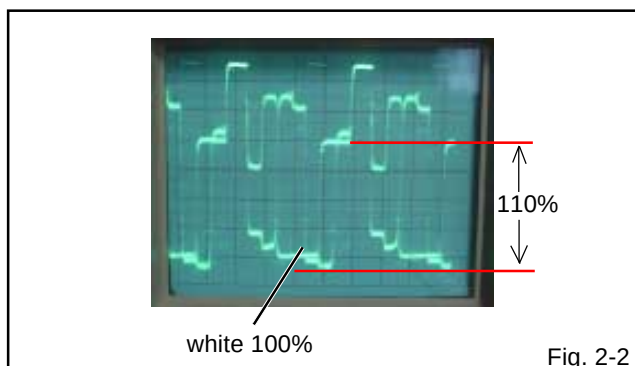


Fig. 2-2

2-7: HORIZONTAL PHASE

1. Receive the monoscope pattern from the Pattern Generator.
2. Activate the adjustment mode display of **Fig. 1-1** and press the channel button **(05)** on the remote control to select "H.PHAS".
3. Press the VOL. UP/DOWN button on the remote control until the SHIFT quantity of the OVER SCAN on right and left becomes minimum.

2-8: BRIGHT CENTER

1. Receive the monoscope pattern. (RF Input)
2. Activate the adjustment mode display of **Fig. 1-1** and press the channel button **(13)** on the remote control to select "BRI.CENT".
3. Press the VOL. UP/DOWN button on the remote control until the white 7.5% is starting to be visible.
4. Receive the monoscope pattern. (Audio Video Input)
5. Press the TV/AV button on the remote to set to the AV mode. Then perform the above adjustment 2 and 3.

2-9: VERTICAL SHIFT

1. Receive the monoscope pattern from the Pattern Generator.
2. Activate the adjustment mode display of **Fig. 1-1** and press the channel button **(07)** on the remote control to select "V.SFT".
3. Press the VOL. UP/DOWN button on the remote control until the horizontal line becomes fit to the notch of the shadow mask.

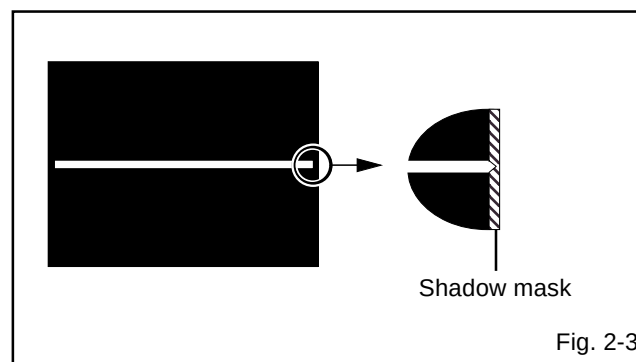


Fig. 2-3

2-10: OSD POSITION

1. Activate the adjustment mode display of **Fig. 1-1**.
2. Press the VOL. UP/DOWN button on the remote control until the difference of A and B becomes minimum. **(Refer to Fig. 2-4)**

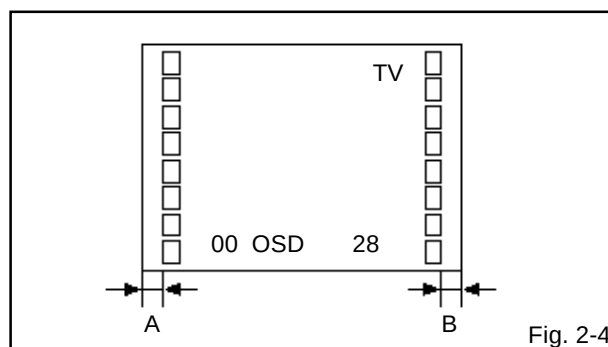


Fig. 2-4

ELECTRICAL ADJUSTMENTS

2-11: CONTRAST MAX

1. Receive the color bar pattern.(RF Input)
2. Activate the adjustment mode display of **Fig. 1-1**
press the channel button **(17)** on the remote control
to select "CONT.MAX".
3. Press the VOL. UP/DOWN button on the remote control
until the contrast step No. becomes "70".
4. Receive the color bar pattern. (Audio Video Input)
5. Press the TV/AV button on the remote to set to the
AV mode.
6. Activate the adjustment mode display of **Fig. 1-1**
press the channel button **(17)** on the remote control
to select "CONT.MAX".
7. Press the VOL. UP/DOWN button on the remote control
until the contrast step No. becomes "77".

2-12: Confirmation of Fixed Value (Step No.)

Please check if the fixed values of the each adjustment
items are set correctly referring below.

NO.	FUNCTION	STEP NO.
04	H. VCO	04
14	BRIGHT MAX	183
15	BRIGHT MIN	60
16	CONT CENT	30
18	CONT MIN	17
20	COLOR MAX	74
21	COLOR MIN	00
23	SHARPNESS	45
24	FM LEVEL	00
25	LEVEL	00
26	SEPARTION1	00
27	SEPARTION2	00

ELECTRICAL ADJUSTMENTS

3. PURITY AND CONVERGENCE ADJUSTMENTS

NOTE

1. Turn the unit on and let it warm up for at least 30 minutes before performing the following adjustments.
2. Place the CRT surface facing east or west to reduce the terrestrial magnetism.
3. Turn ON the unit and demagnetize with a Degauss Coil.

3-1: STATIC CONVERGENCE (ROUGH ADJUSTMENT)

1. Tighten the screw for the magnet. Refer to the adjusted CRT for the position. **(Refer to Fig. 3-1)**
If the deflection yoke and magnet are in one body, untighten the screw for the body.
2. Receive the green raster pattern from the color bar generator.
3. Slide the deflection yoke until it touches the funnel side of the CRT.
4. Adjust center of screen to green, with red and blue on the sides, using the pair of purity magnets.
5. Switch the color bar generator from the green raster pattern to the crosshatch pattern.
6. Combine red and blue of the 3 color crosshatch pattern on the center of the screen by adjusting the pair of 4 pole magnets.
7. Combine red/blue (magenta) and green by adjusting the pair of 6 pole magnets.
8. Adjust the crosshatch pattern to change to white by repeating steps 6 and 7.

3-2: PURITY

NOTE

Adjust after performing adjustments in section 3-1.

1. Receive the green raster pattern from color bar generator.
2. Adjust the pair of purity magnets to center the color on the screen.
Adjust the pair of purity magnets so the color at the ends are equally wide.
3. Move the deflection yoke backward (to neck side) slowly, and stop it at the position when the whole screen is green.
4. Confirm red and blue colors.
5. Adjust the slant of the deflection yoke while watching the screen, then tighten the fixing screw.

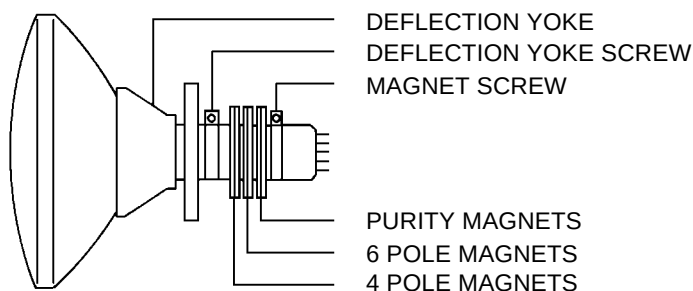


Fig. 3-1

3-3: STATIC CONVERGENCE

NOTE

Adjust after performing adjustments in section 3-2.

1. Receive the crosshatch pattern from the color bar generator.
2. Combine red and blue of the 3 color crosshatch pattern on the center of the screen by adjusting the pair of 4 pole magnets.
3. Combine red/blue (magenta) and green by adjusting the pair of 6 pole magnets.

3-4: DYNAMIC CONVERGENCE

NOTE

Adjust after performing adjustments in section 3-3.

1. Adjust the differences around the screen by moving the deflection yoke upward/downward and right/left. **(Refer to Fig. 3-2-a)**
2. Insert three wedges between the deflection yoke and CRT funnel to fix the deflection yoke. **(Refer to Fig. 3-2-b)**

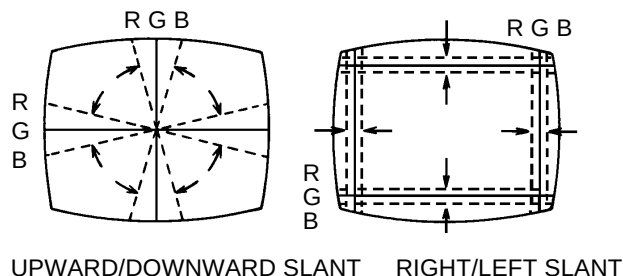


Fig. 3-2-a


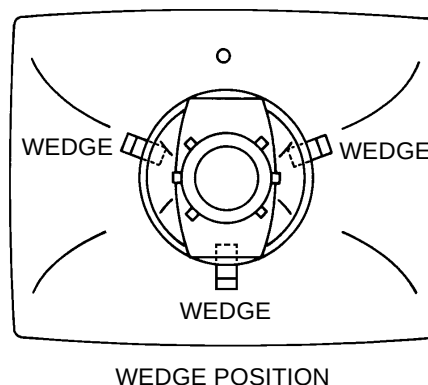



Fig. 3-2-b

ELECTRICAL ADJUSTMENTS


4. ELECTRICAL ADJUSTMENT PARTS LOCATION GUIDE (WIRING CONNECTION)

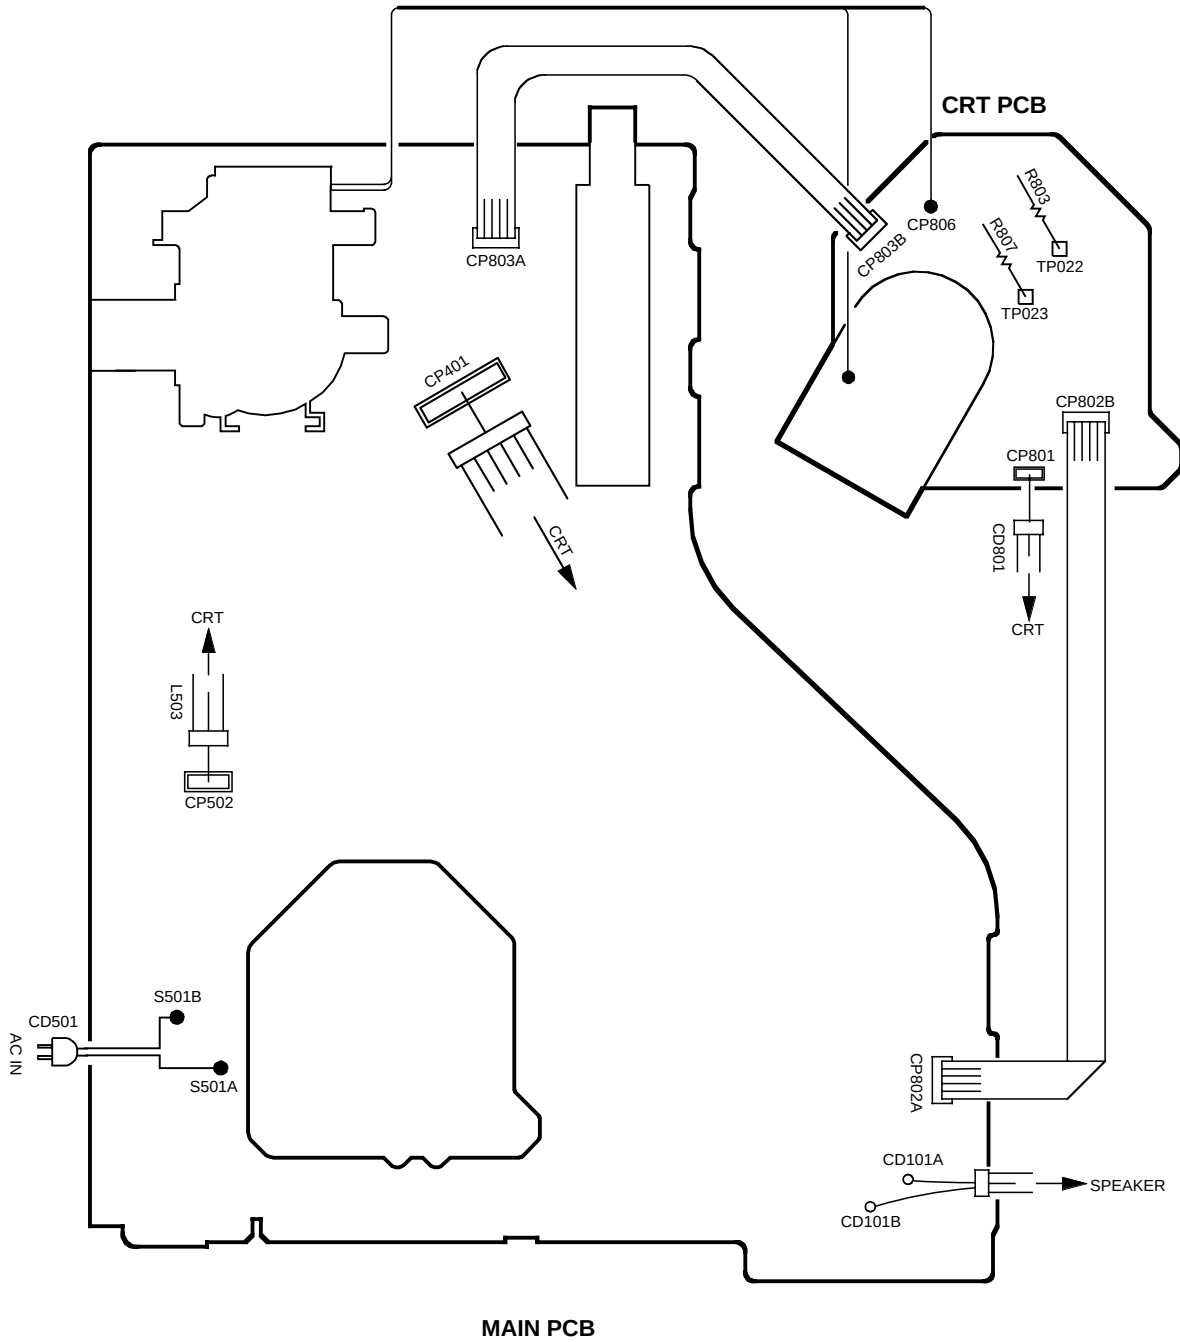

BLOCK DIAGRAM

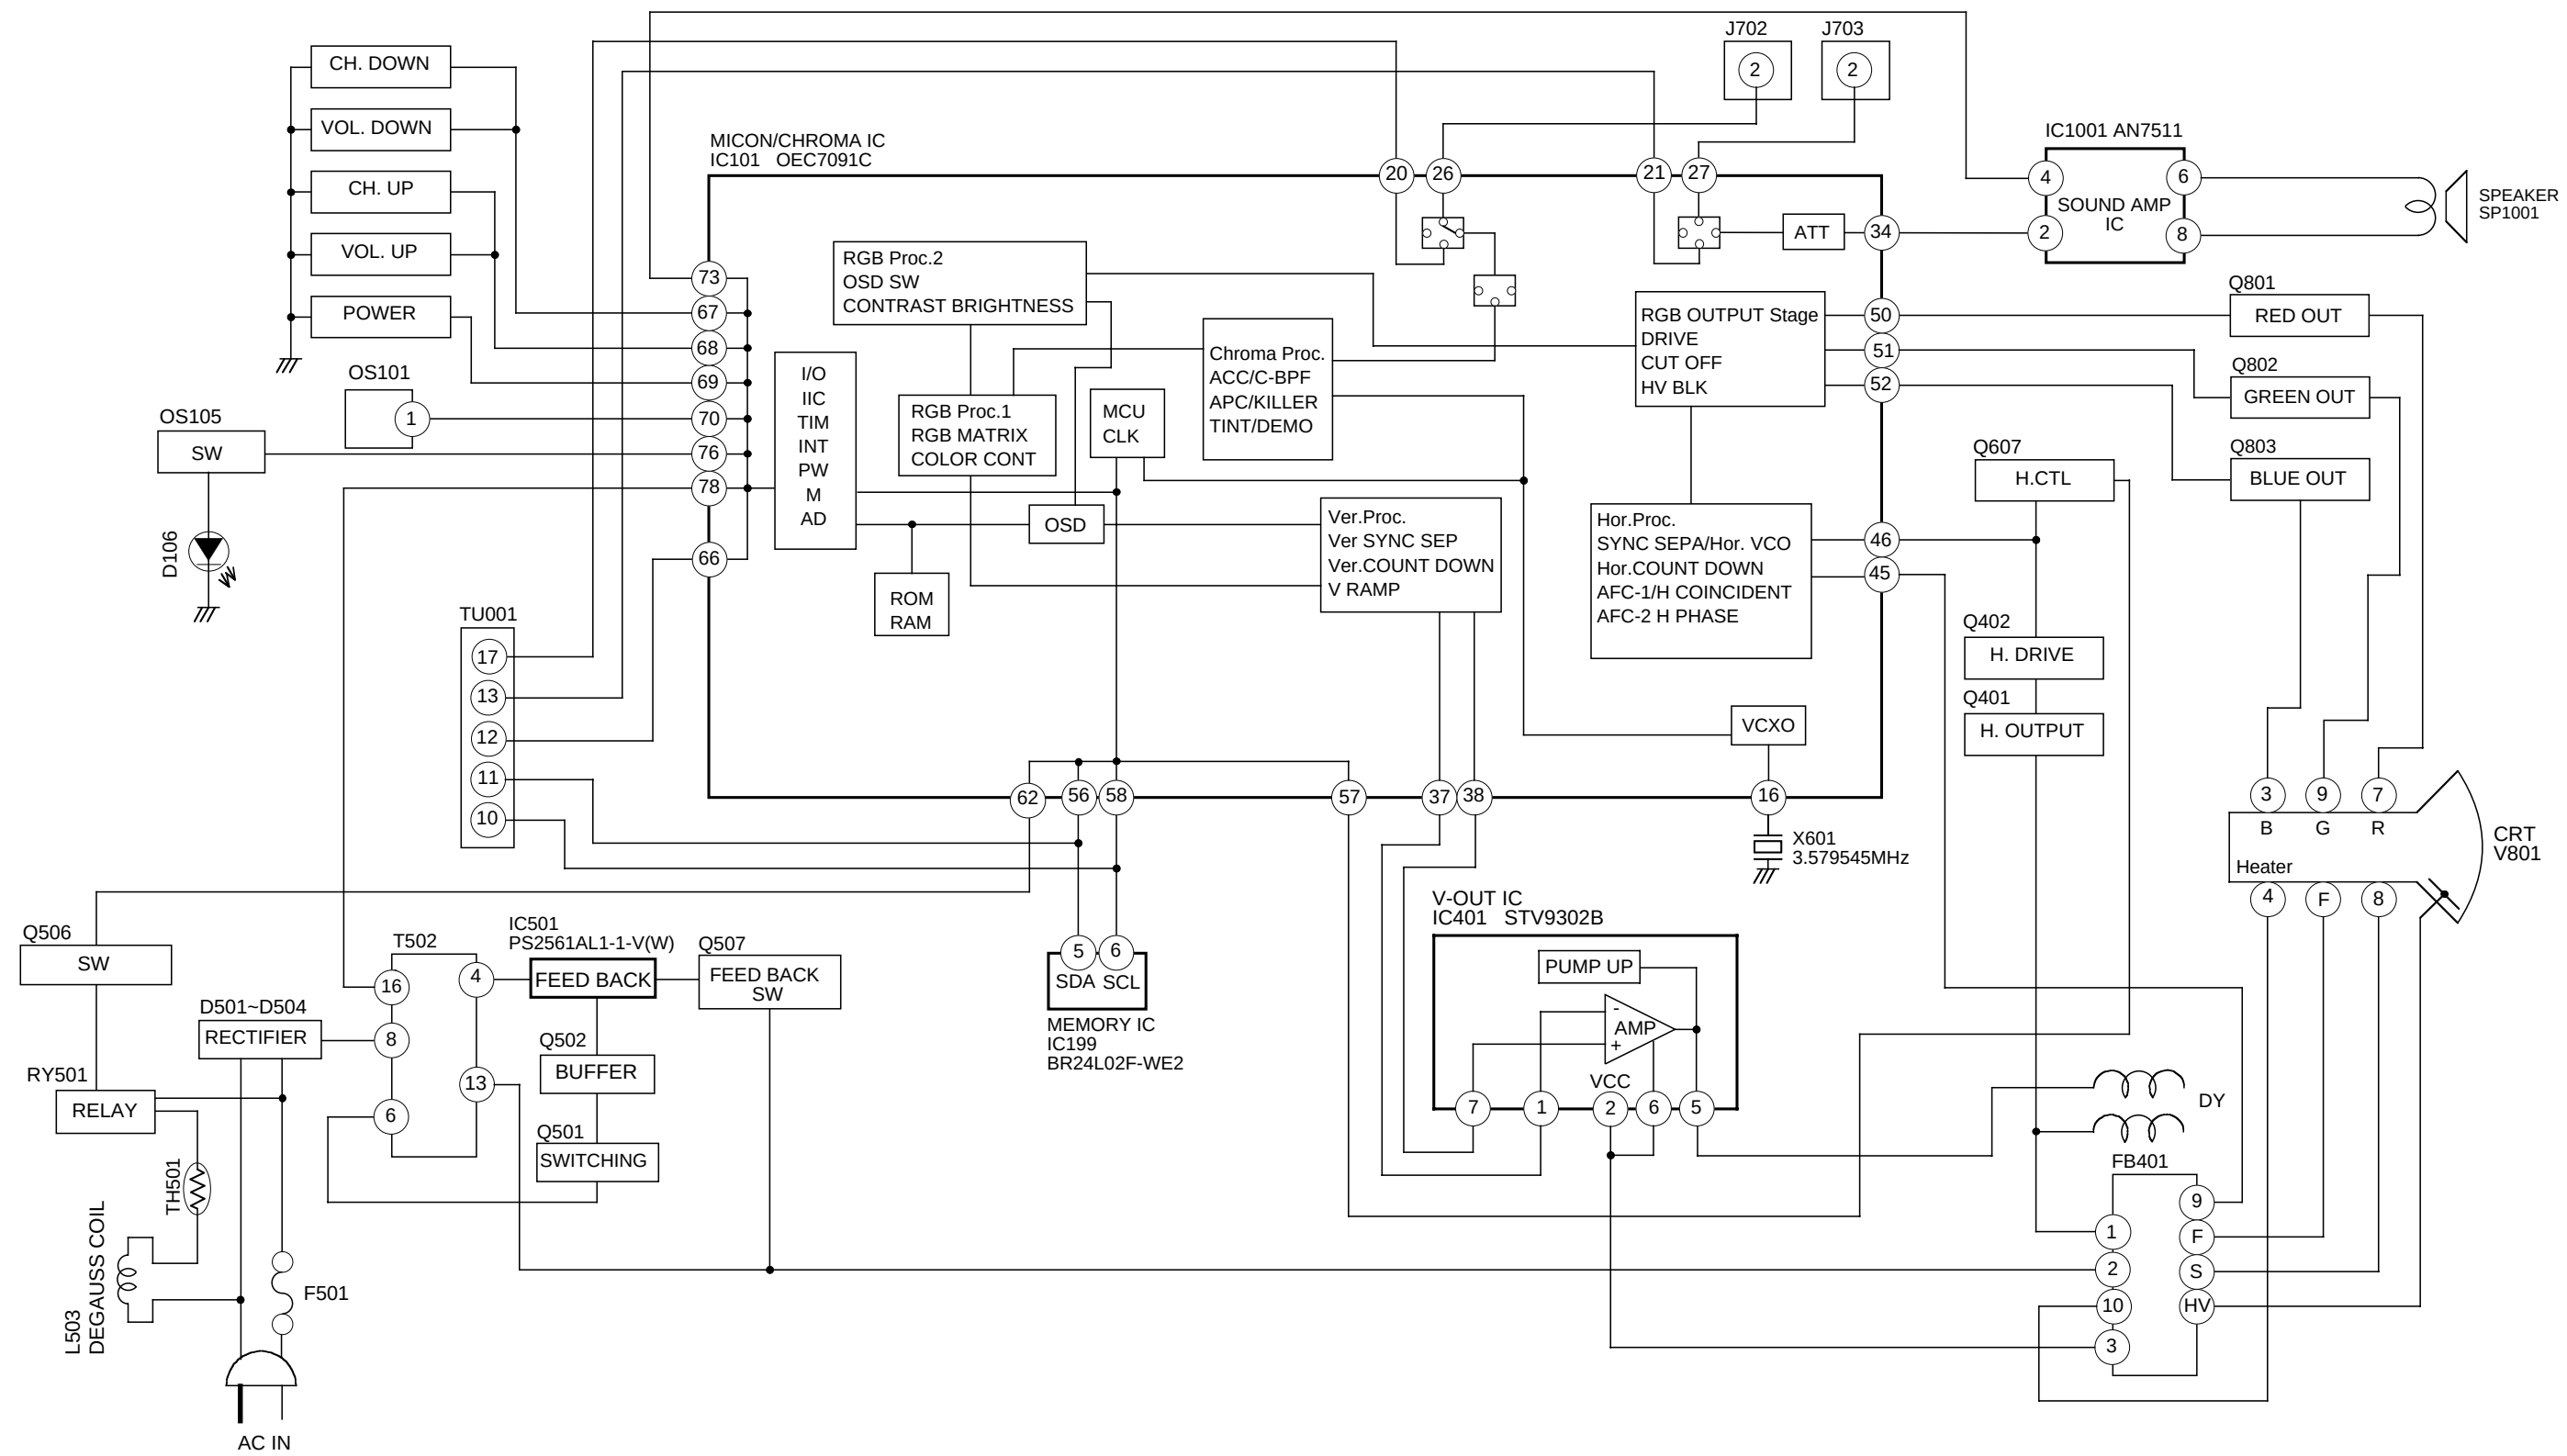


**PRINTED CIRCUIT BOARDS
MAIN/CRT (INSERTED PARTS)**

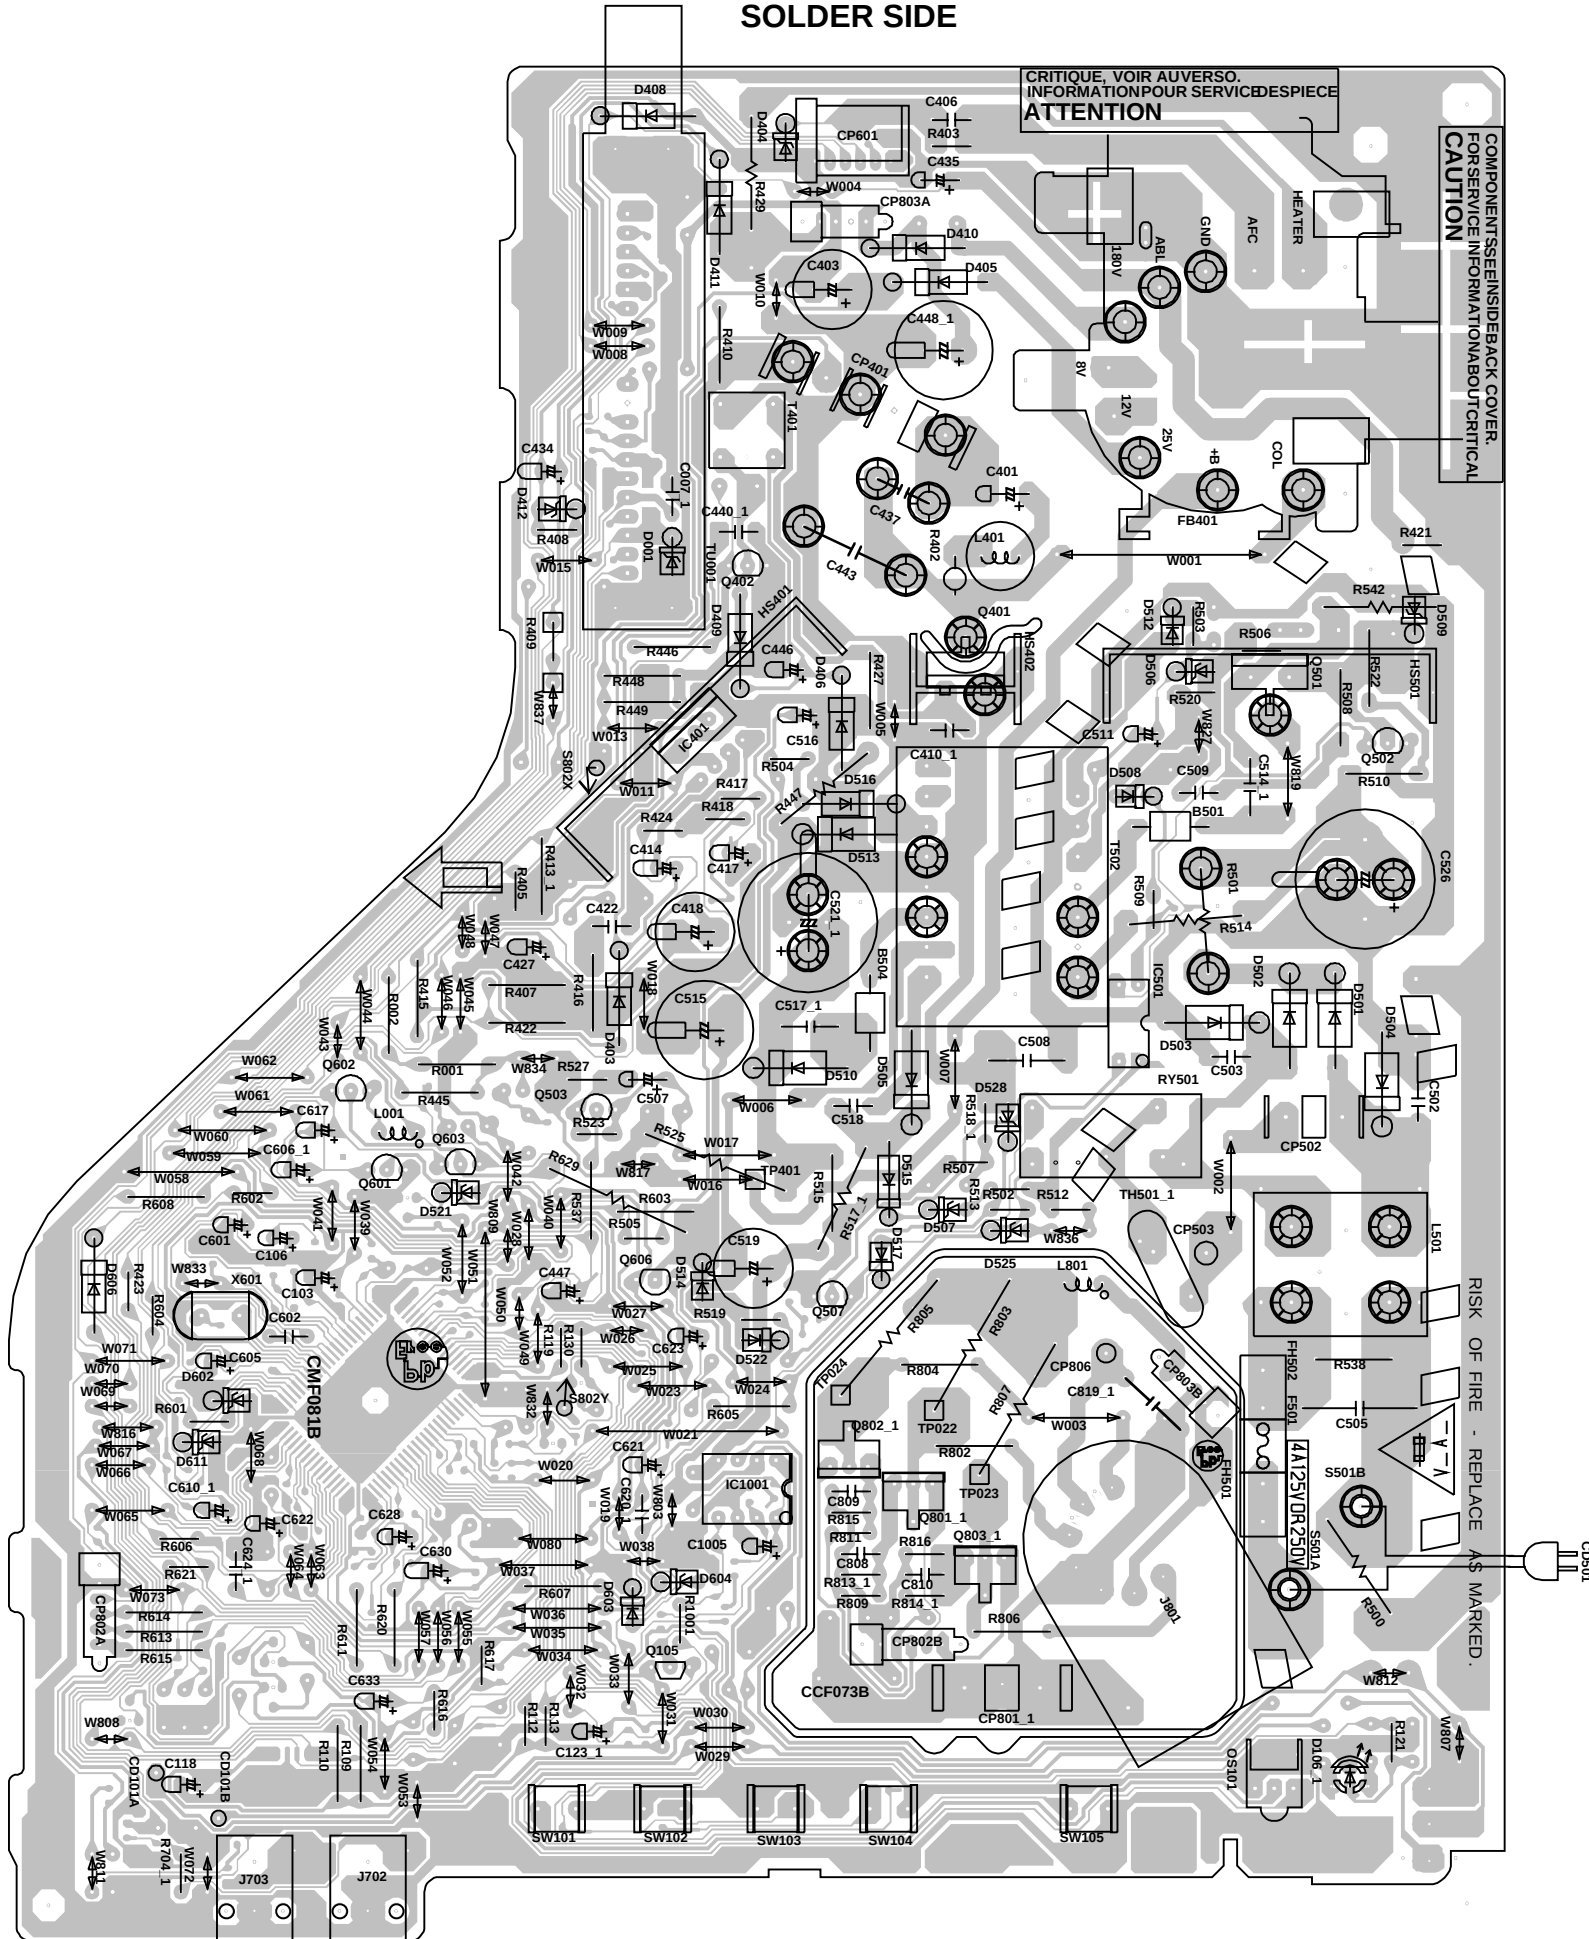

This image shows the solder side of a PCB layout. The layout is complex, featuring a central microcontroller (IC101) surrounded by numerous resistors (R101, R102, R103, R104, R105, R106, R107, R108, R109, R110, R111, R112, R113, R114, R115, R116, R117, R118, R119, R120, R121, R122, R123, R124, R125, R126, R127, R128, R129, R130, R131, R132, R133, R134, R135, R136, R137, R138, R139, R140, R141, R142, R143, R144, R145, R146, R147, R148, R149, R150, R151, R152, R153, R154, R155, R156, R157, R158, R159, R160, R161, R162, R163, R164, R165, R166, R167, R168, R169, R170, R171, R172, R173, R174, R175, R176, R177, R178, R179, R180, R181, R182, R183, R184, R185, R186, R187, R188, R189, R190, R191, R192, R193, R194, R195, R196, R197, R198, R199, R200, R201, R202, R203, R204, R205, R206, R207, R208, R209, R210, R211, R212, R213, R214, R215, R216, R217, R218, R219, R220, R221, R222, R223, R224, R225, R226, R227, R228, R229, R230, R231, R232, R233, R234, R235, R236, R237, R238, R239, R240, R241, R242, R243, R244, R245, R246, R247, R248, R249, R250, R251, R252, R253, R254, R255, R256, R257, R258, R259, R260, R261, R262, R263, R264, R265, R266, R267, R268, R269, R270, R271, R272, R273, R274, R275, R276, R277, R278, R279, R280, R281, R282, R283, R284, R285, R286, R287, R288, R289, R290, R291, R292, R293, R294, R295, R296, R297, R298, R299, R300, R301, R302, R303, R304, R305, R306, R307, R308, R309, R310, R311, R312, R313, R314, R315, R316, R317, R318, R319, R320, R321, R322, R323, R324, R325, R326, R327, R328, R329, R330, R331, R332, R333, R334, R335, R336, R337, R338, R339, R340, R341, R342, R343, R344, R345, R346, R347, R348, R349, R350, R351, R352, R353, R354, R355, R356, R357, R358, R359, R360, R361, R362, R363, R364, R365, R366, R367, R368, R369, R370, R371, R372, R373, R374, R375, R376, R377, R378, R379, R380, R381, R382, R383, R384, R385, R386, R387, R388, R389, R390, R391, R392, R393, R394, R395, R396, R397, R398, R399, R400, R401, R402, R403, R404, R405, R406, R407, R408, R409, R410, R411, R412, R413, R414, R415, R416, R417, R418, R419, R420, R421, R422, R423, R424, R425, R426, R427, R428, R429, R430, R431, R432, R433, R434, R435, R436, R437, R438, R439, R440, R441, R442, R443, R444, R445, R446, R447, R448, R449, R450, R451, R452, R453, R454, R455, R456, R457, R458, R459, R460, R461, R462, R463, R464, R465, R466, R467, R468, R469, R470, R471, R472, R473, R474, R475, R476, R477, R478, R479, R480, R481, R482, R483, R484, R485, R486, R487, R488, R489, R490, R491, R492, R493, R494, R495, R496, R497, R498, R499, R500, R501, R502, R503, R504, R505, R506, R507, R508, R509, R510, R511, R512, R513, R514, R515, R516, R517, R518, R519, R520, R521, R522, R523, R524, R525, R526, R527, R528, R529, R530, R531, R532, R533, R534, R535, R536, R537, R538, R539, R540, R541, R542, R543, R544, R545, R546, R547, R548, R549, R550, R551, R552, R553, R554, R555, R556, R557, R558, R559, R560, R561, R562, R563, R564, R565, R566, R567, R568, R569, R570, R571, R572, R573, R574, R575, R576, R577, R578, R579, R580, R581, R582, R583, R584, R585, R586, R587, R588, R589, R590, R591, R592, R593, R594, R595, R596, R597, R598, R599, R600, R601, R602, R603, R604, R605, R606, R607, R608, R609, R610, R611, R612, R613, R614, R615, R616, R617, R618, R619, R620, R621, R622, R623, R624, R625, R626, R627, R628, R629, R630, R631, R632, R633, R634, R635, R636, R637, R638, R639, R640, R641, R642, R643, R644, R645, R646, R647, R648, R649, R650, R651, R652, R653, R654, R655, R656, R657, R658, R659, R660, R661, R662, R663, R664, R665, R666, R667, R668, R669, R670, R671, R672, R673, R674, R675, R676, R677, R678, R679, R680, R681, R682, R683, R684, R685, R686, R687, R688, R689, R690, R691, R692, R693, R694, R695, R696, R697, R698, R699, R700, R701, R702, R703, R704, R705, R706, R707, R708, R709, R710, R711, R712, R713, R714, R715, R716, R717, R718, R719, R720, R721, R722, R723, R724, R725, R726, R727, R728, R729, R730, R731, R732, R733, R734, R735, R736, R737, R738, R739, R740, R741, R742, R743, R744, R745, R746, R747, R748, R749, R750, R751, R752, R753, R754, R755, R756, R757, R758, R759, R760, R761, R762, R763, R764, R765, R766, R767, R768, R769, R770, R771, R772, R773, R774, R775, R776, R777, R778, R779, R780, R781, R782, R783, R784, R785, R786, R787, R788, R789, R790, R791, R792, R793, R794, R795, R796, R797, R798, R799, R800, R801, R802, R803, R804, R805, R806, R807, R808, R809, R810, R811, R812, R813, R814, R815, R816, R817, R818, R819, R820, R821, R822, R823, R824, R825, R826, R827, R828, R829, R830, R831, R832, R833, R834, R835, R836, R837, R838, R839, R840, R841, R842, R843, R844, R845, R846, R847, R848, R849, R850, R851, R852, R853, R854, R855, R856, R857, R858, R859, R860, R861, R862, R863, R864, R865, R866, R867, R868, R869, R870, R871, R872, R873, R874, R875, R876, R877, R878, R879, R880, R881, R882, R883, R884, R885, R886, R887, R888, R889, R890, R891, R892, R893, R894, R895, R896, R897, R898, R899, R900, R901, R902, R903, R904, R905

MICON/CHROMA/TUNER SCHEMATIC DIAGRAM (MAIN PCB)

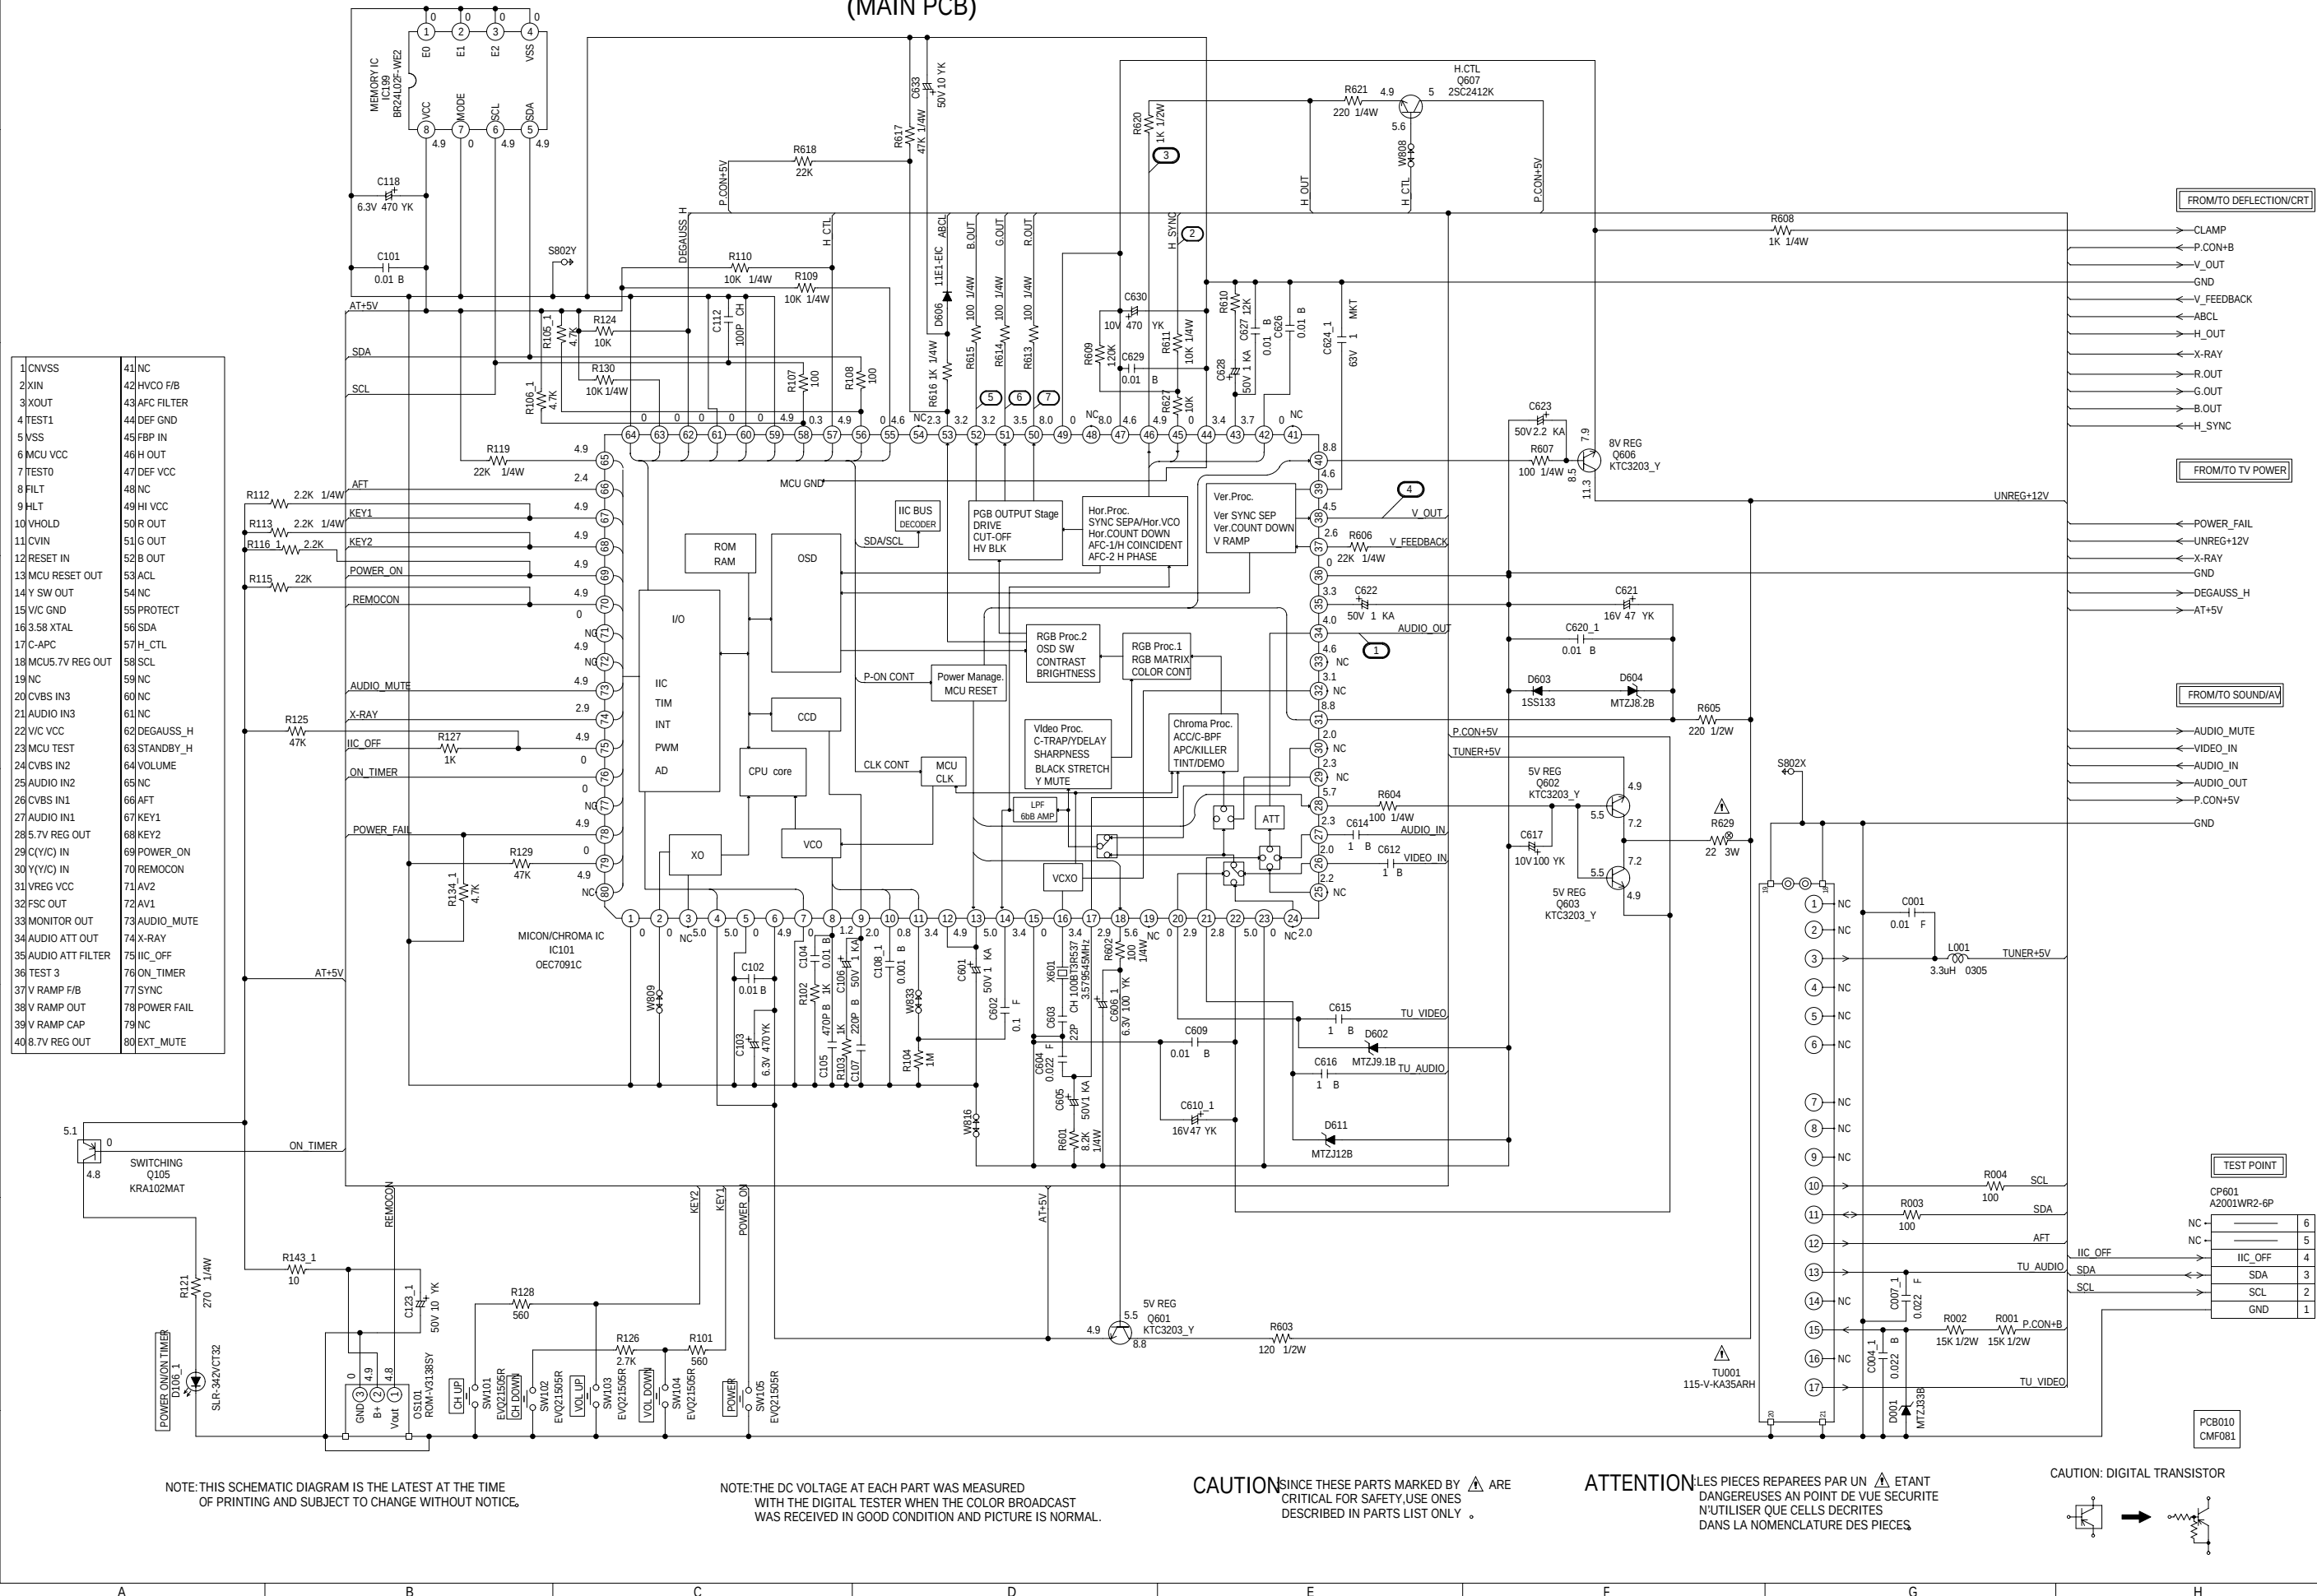

NOTE: THIS SCHEMATIC DIAGRAM IS THE LATEST AT THE TIME OF PRINTING AND SUBJECT TO CHANGE WITHOUT NOTICE.

NOTE: THE DC VOLTAGE AT EACH PART WAS MEASURED WITH THE DIGITAL TESTER WHEN THE COLOR BROADCAST WAS RECEIVED IN GOOD CONDITION AND PICTURE IS NORMAL.

CAUTION SINCE THESE PARTS MARKED BY ARE CRITICAL FOR SAFETY, USE ONES DESCRIBED IN PARTS LIST ONLY.

ATTENTION LES PIECES REPARÉES PAR UN ÉTANT DANGEREUSES AN POINT DE VUE SECURITE N'UTILISER QUE CELLS DECRITES DANS LA NOMENCLATURE DES PIECES


CAUTION: DIGITAL TRANSISTOR



TV POWER SCHEMATIC DIAGRAM
(MAIN PCB)

CAUTION: FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,
REPLACE ONLY WITH THE SAME TYPE 4A 125V (F501)
FUSE.

ATTENTION: POUR UNE PROTECTION CONTINUE LES RISQUES
D'INCENDIE N'UTILISER QUE DES FUSIBLE DE MEME
TYPE 4A 125V (F501).

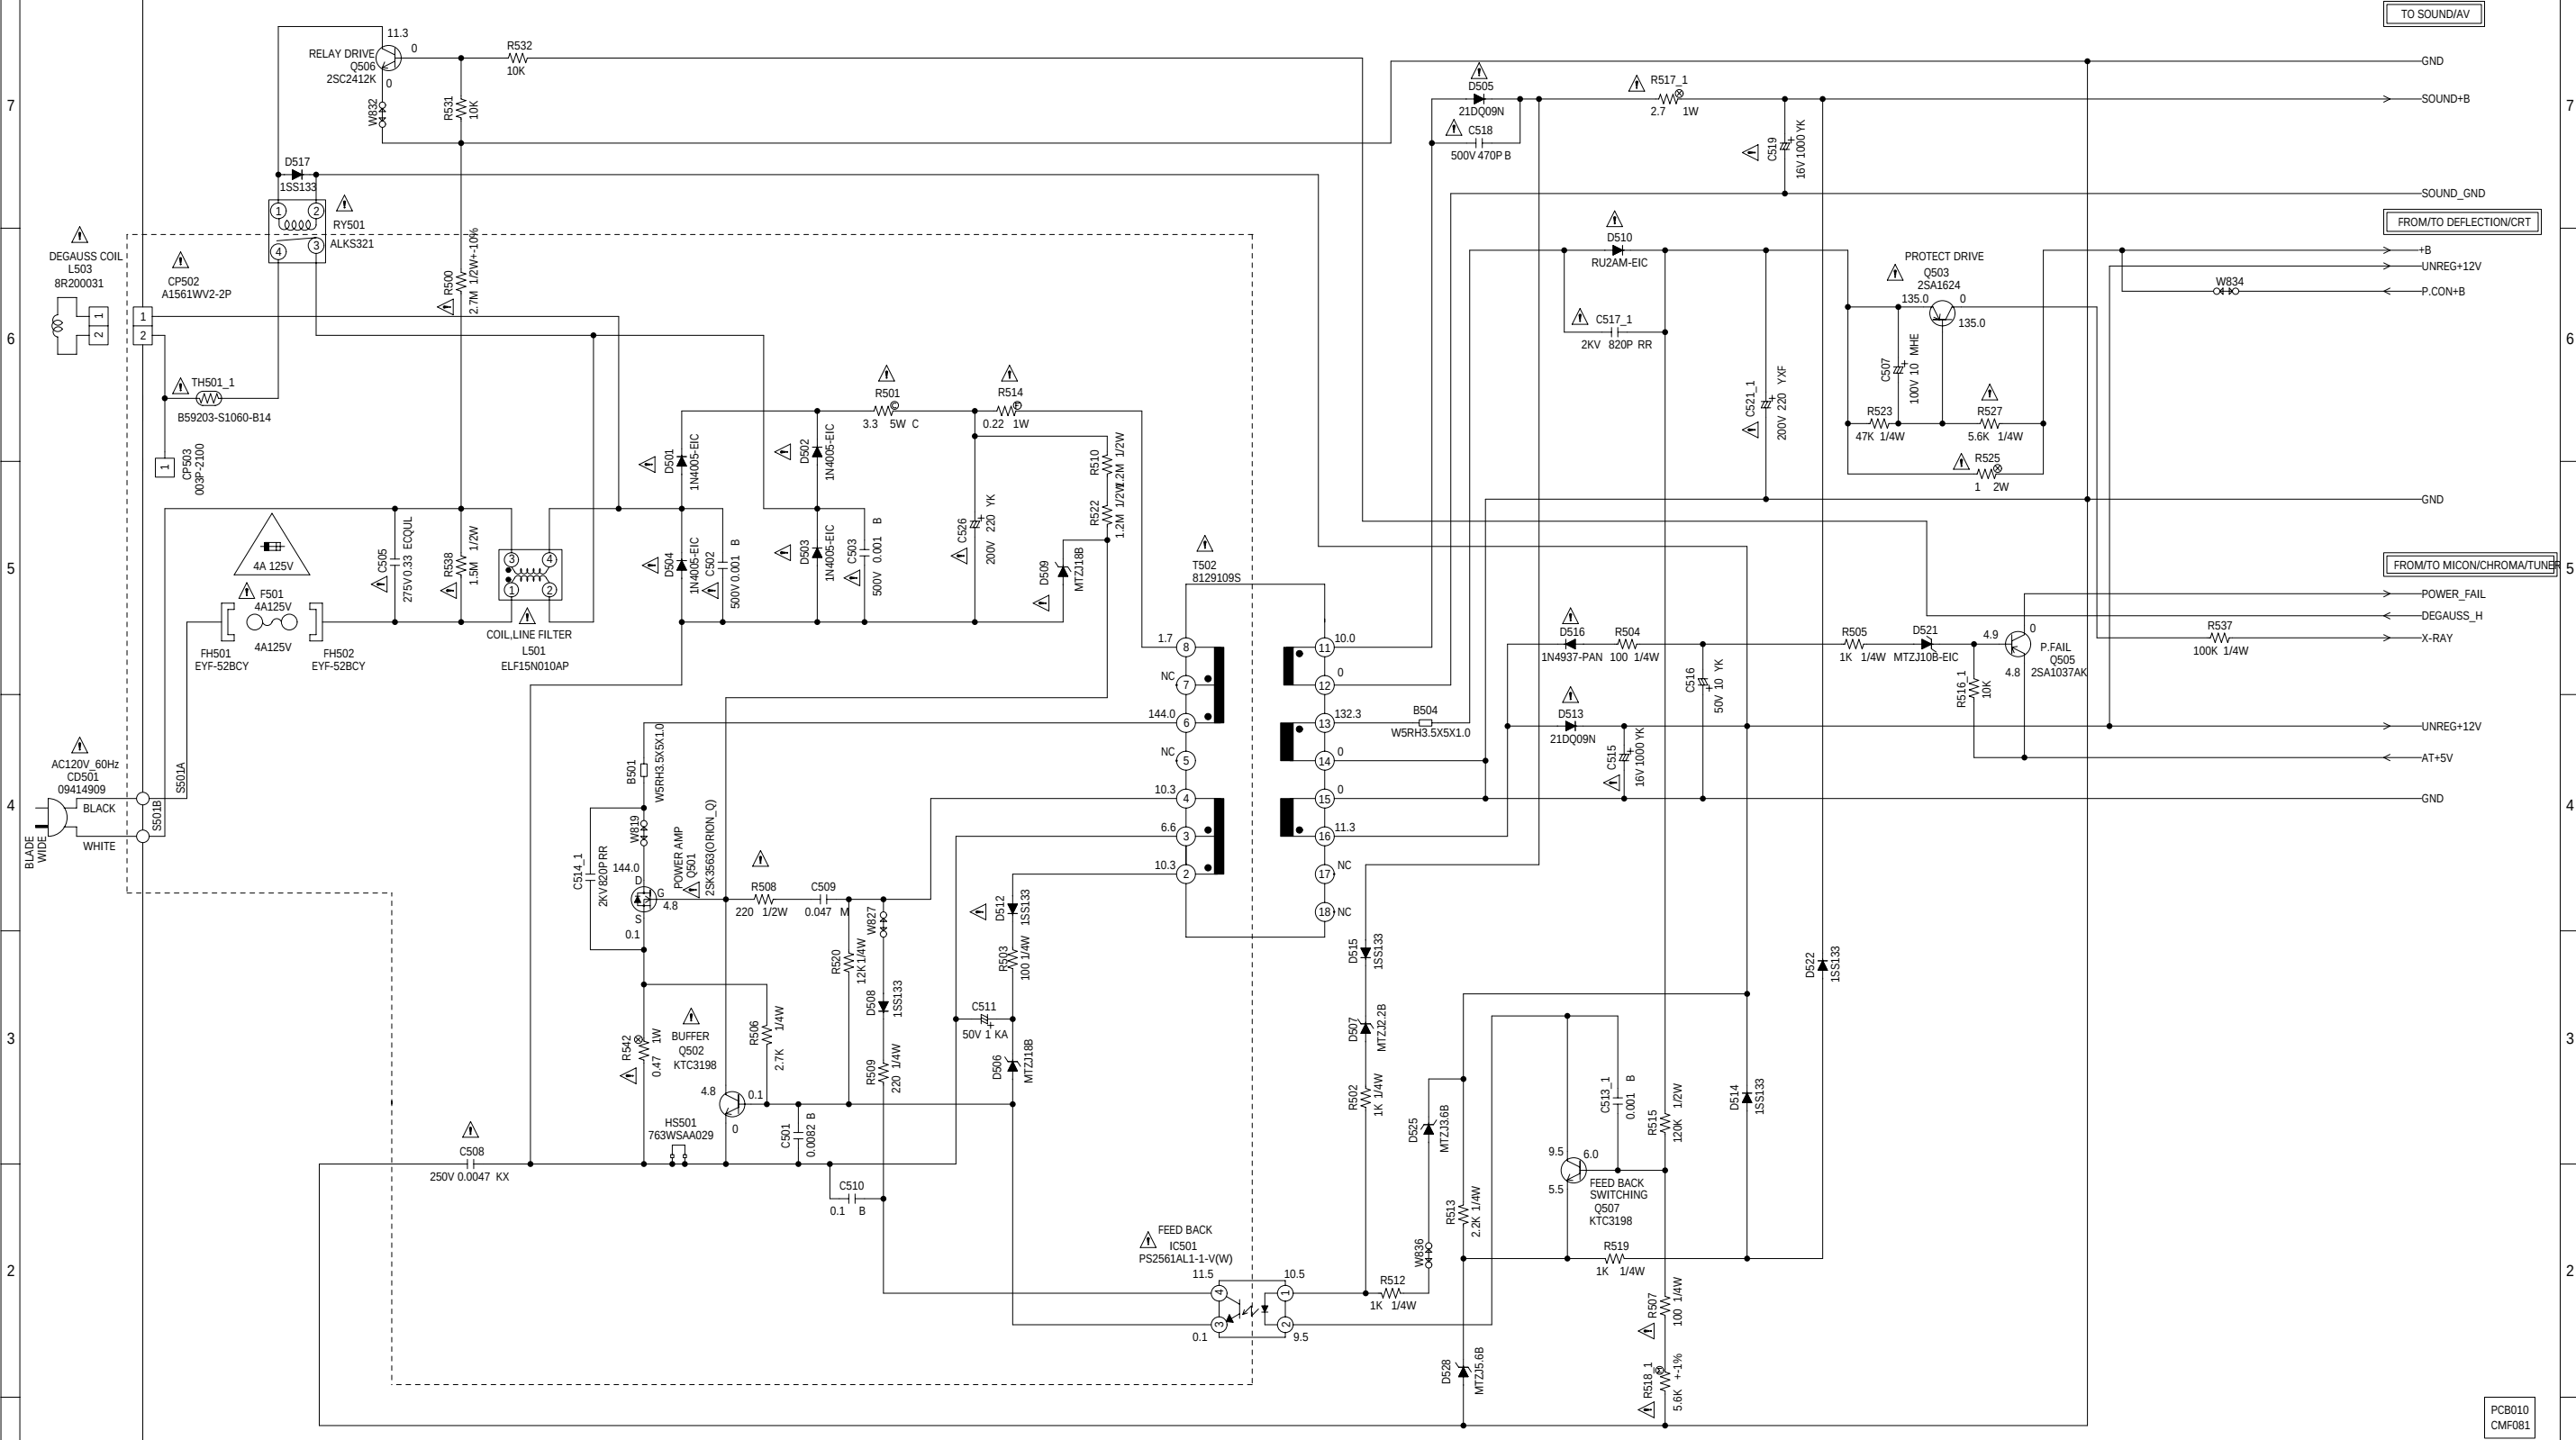

NOTE: THE RESISTOR MARKED F IS FUSE RESISTOR.
THE ALUMI ELECTROLYTIC CAPACITOR MARKED NP
IS NON POLAR ONE.

NOTE: THIS SCHEMATIC DIAGRAM IS THE LATEST AT THE TIME
OF PRINTING AND SUBJECT TO CHANGE WITHOUT NOTICE.


NOTE: THE DC VOLTAGE AT EACH PART WAS MEASURED
WITH THE DIGITAL TESTER WHEN THE COLOR BROADCAST
WAS RECEIVED IN GOOD CONDITION AND PICTURE IS NORMAL.

CAUTION: SINCE THESE PARTS MARKED BY ARE
CRITICAL FOR SAFETY, USE ONES
DESCRIBED IN PARTS LIST ONLY.

ATTENTION: LES PIECES REPARÉES PAR UN ÉTANT
DANGEREUSES AU POINT DE VUE SÉCURITÉ
N'UTILISER QUE CELLES DÉCRITES
DANS LA NOMENCLATURE DES PIÈCES.

PCB010
CMF081

DEFLECTION/CRT SCHEMATIC DIAGRAM (MAIN PCB)

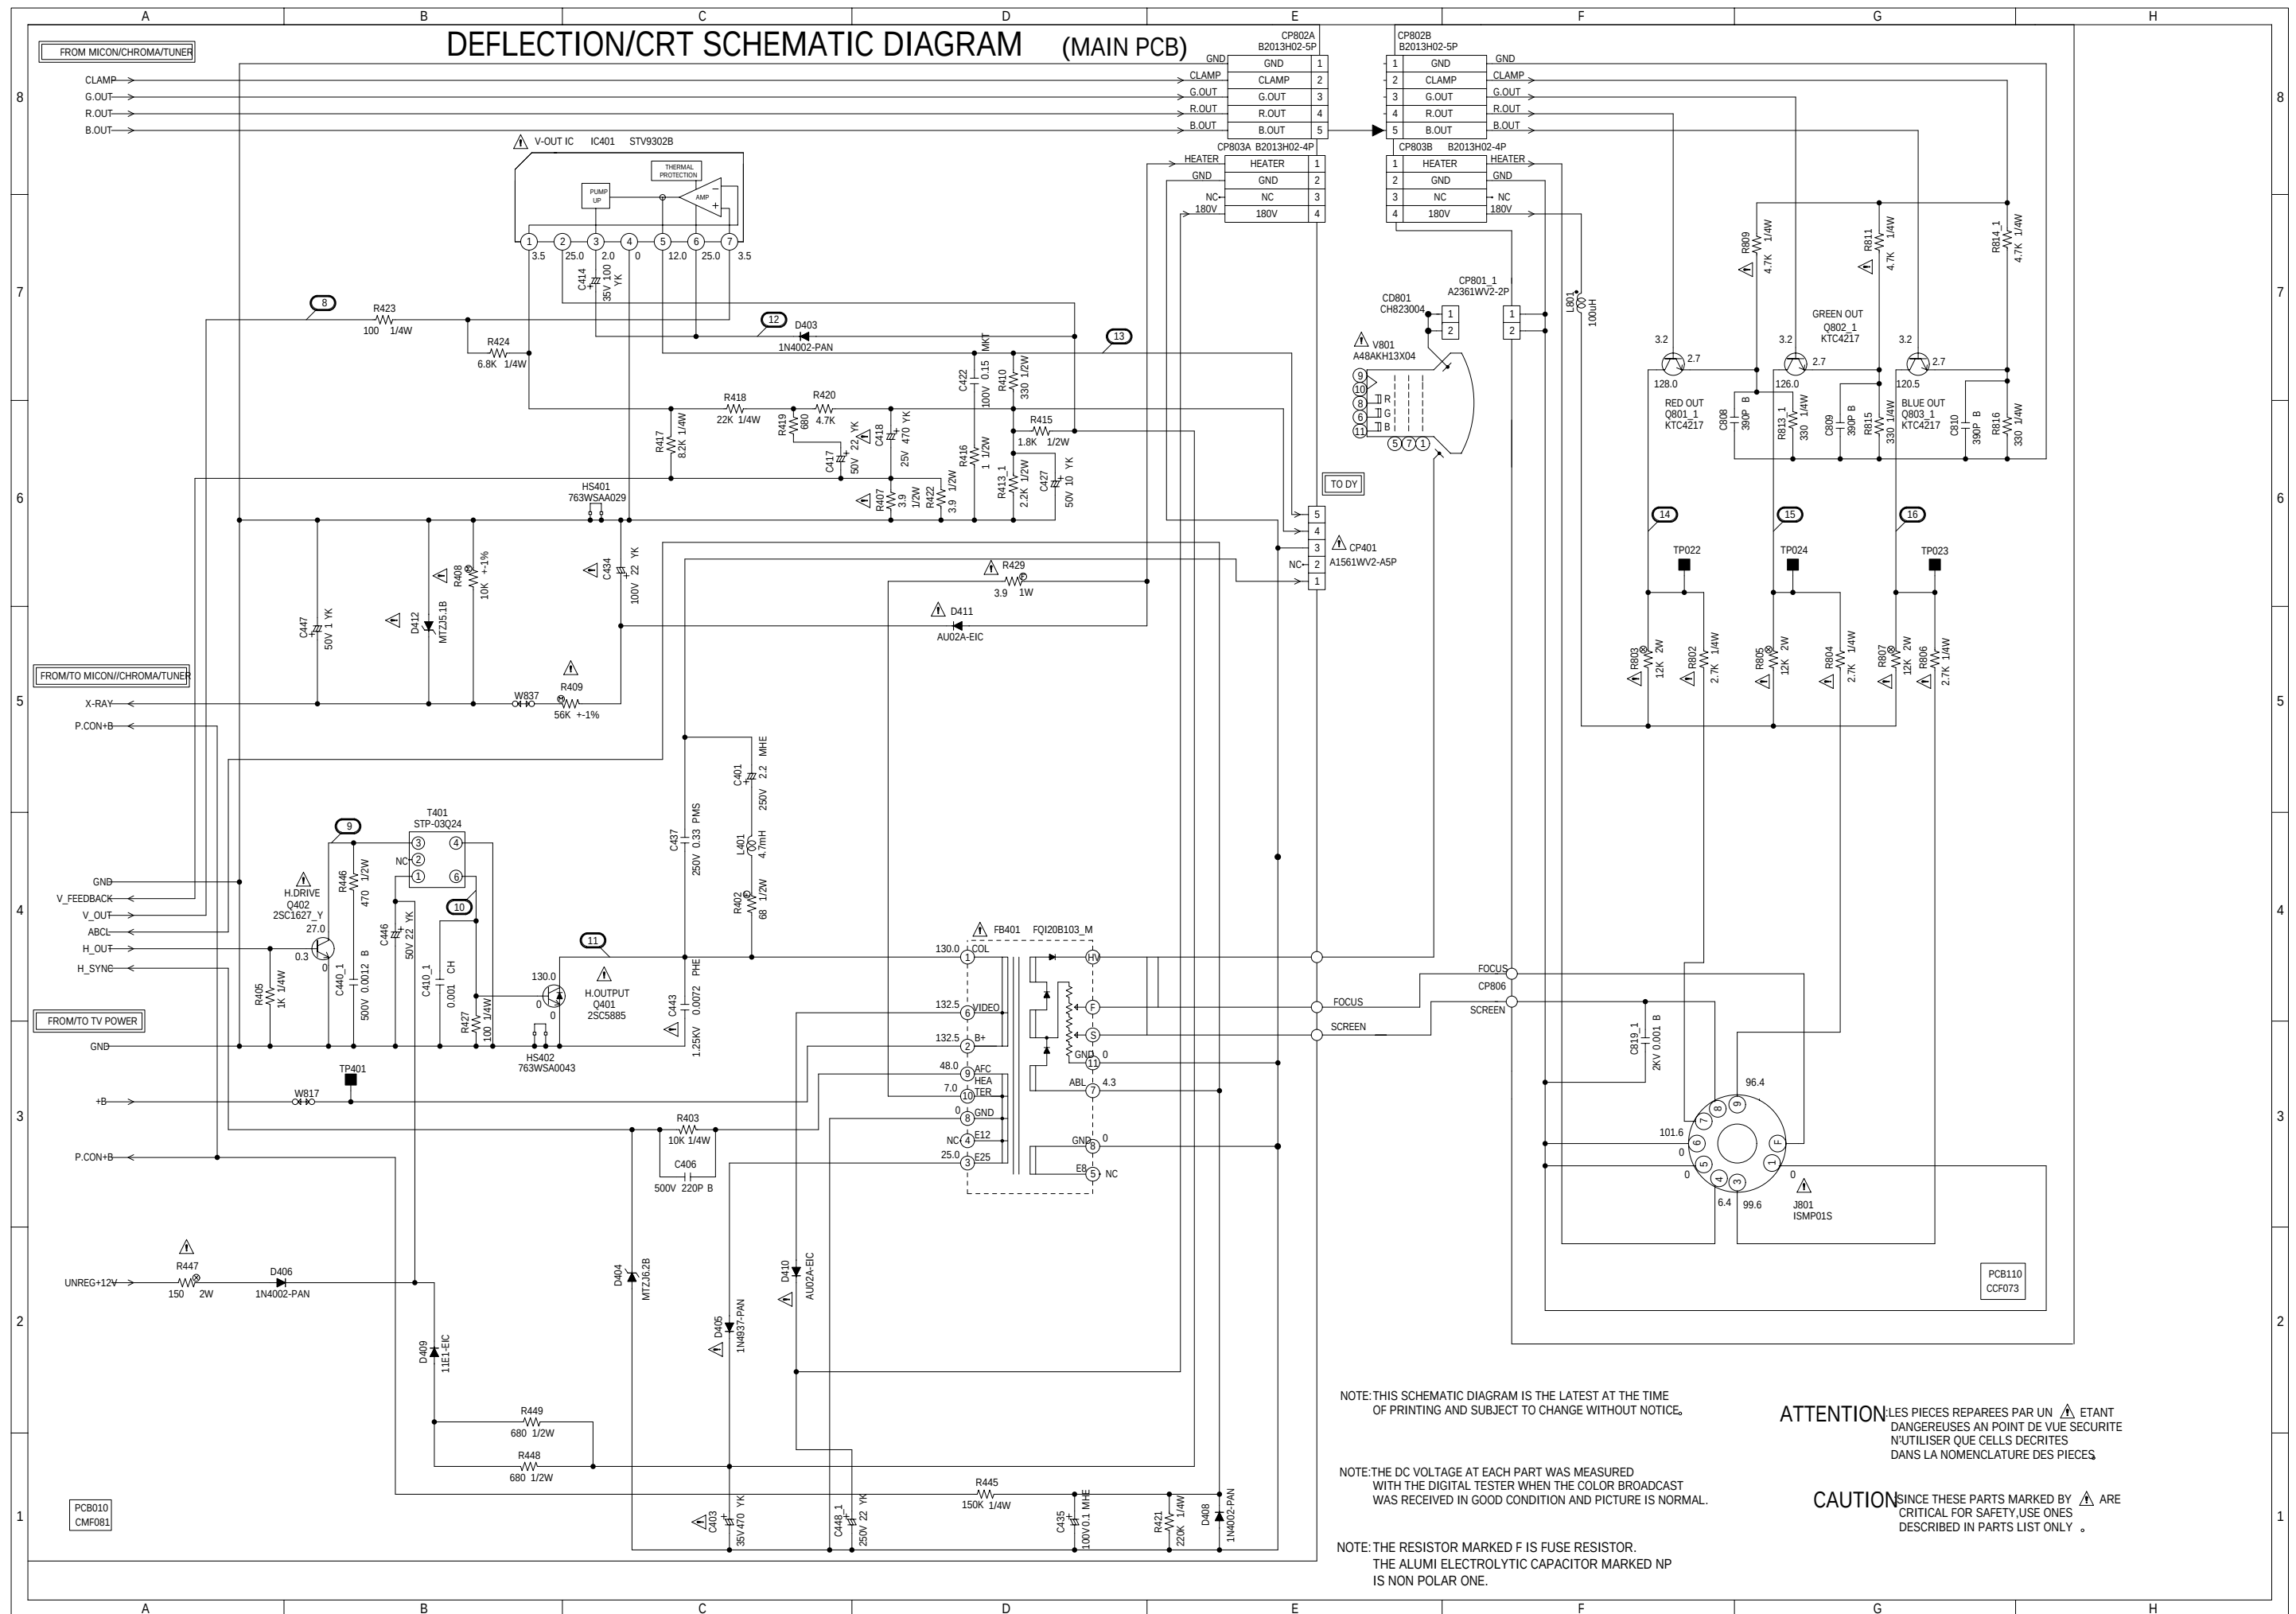

NOTE: THIS SCHEMATIC DIAGRAM IS THE LATEST AT THE TIME OF PRINTING AND SUBJECT TO CHANGE WITHOUT NOTICE.

NOTE: THE DC VOLTAGE AT EACH PART WAS MEASURED WITH THE DIGITAL TESTER WHEN THE COLOR BROADCAST WAS RECEIVED IN GOOD CONDITION AND PICTURE IS NORMAL.


NOTE: THE RESISTOR MARKED F IS FUSE RESISTOR. THE ALUMI ELECTROLYTIC CAPACITOR MARKED NP IS NON POLAR ONE.

ATTENTION: LES PIECES REPARÉES PAR UN ÉTANT DANGEREUSES AN POINT DE VUE SECURITE N'UTILISER QUE CELLS DECRITES DANS LA NOMENCLATURE DES PIECES



CAUTION: SINCE THESE PARTS MARKED BY ARE CRITICAL FOR SAFETY, USE ONES DESCRIBED IN PARTS LIST ONLY.

SOUND/AV SCHEMATIC DIAGRAM
(MAIN PCB)

TO MICON/CHROMA/TUNER

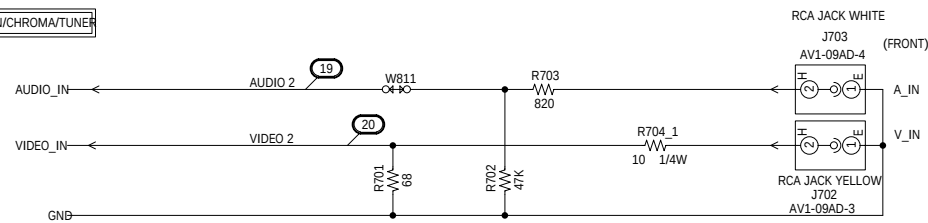

ACCESSORY



FROM TV POWER

SOUND_GND
SOUND+8
GND

FROM MICON/CHROMA/TUNER

AUDIO_MUTE
P.CON+5V
GND
AUDIO_OUT

R1001
47K 1/4W

R1003
68K

R1004
100K

R1005
270K

C1001
0.1 B

R1008
30K

C1004
0.0015 B

C1005
50V 10 YK

IC1001
AN7511

CD101A
CH013209
CD101B
CH013208

SPEAKER
SP1001
S08F21A
8 OHM

NOTE: THIS SCHEMATIC DIAGRAM IS THE LATEST AT THE TIME OF PRINTING AND SUBJECT TO CHANGE WITHOUT NOTICE.

NOTE: THE DC VOLTAGE AT EACH PART WAS MEASURED WITH THE DIGITAL TESTER WHEN THE COLOR BROADCAST WAS RECEIVED IN GOOD CONDITION AND PICTURE IS NORMAL.


CAUTION: SINCE THESE PARTS MARKED BY ARE CRITICAL FOR SAFETY, USE ONES DESCRIBED IN PARTS LIST ONLY.

ATTENTION: LES PIECES REPARÉES PAR UN ÉTANT DANGEREUSES AU POINT DE VUE SÉCURITÉ, N'UTILISER QUE CELLES DÉCRITES DANS LA NOMENCLATURE DES PIÈCES.


PCB010
CMF081

WAVEFORMS


MICON/CHROMA/TUNER




① 0.5V 2ms/div




⑤ 1V 20μs/div




⑨ 20V 20μs/div




② 20V 20μs/div




⑥ 1V 20μs/div




⑩ 2V 20μs/div



③ 200mV 20μs/div




⑦ 1V 20μs/div




⑪ 200V 20μs/div


DEFLECTION/CRT



④ 0.5V 5ms/div



⑧ 0.5V 5ms/div




⑫ 10V 5ms/div


NOTE: The following waveforms were measured at the point of the corresponding balloon number in the schematic diagram.

WAVEFORMS


SOUND/AV




⑬ 10V 5ms/div




⑰ 0.5V 1ms/div




⑭ 50V 20μs/div




⑱ 1V 1ms/div




⑮ 50V 20μs/div



⑲ 200mV 500μs/div




⑯ 50V 20μs/div




⑳ 500mV 20μs/div

NOTE: The following waveforms were measured at the point of the corresponding balloon number in the schematic diagram.

MECHANICAL EXPLODED VIEW

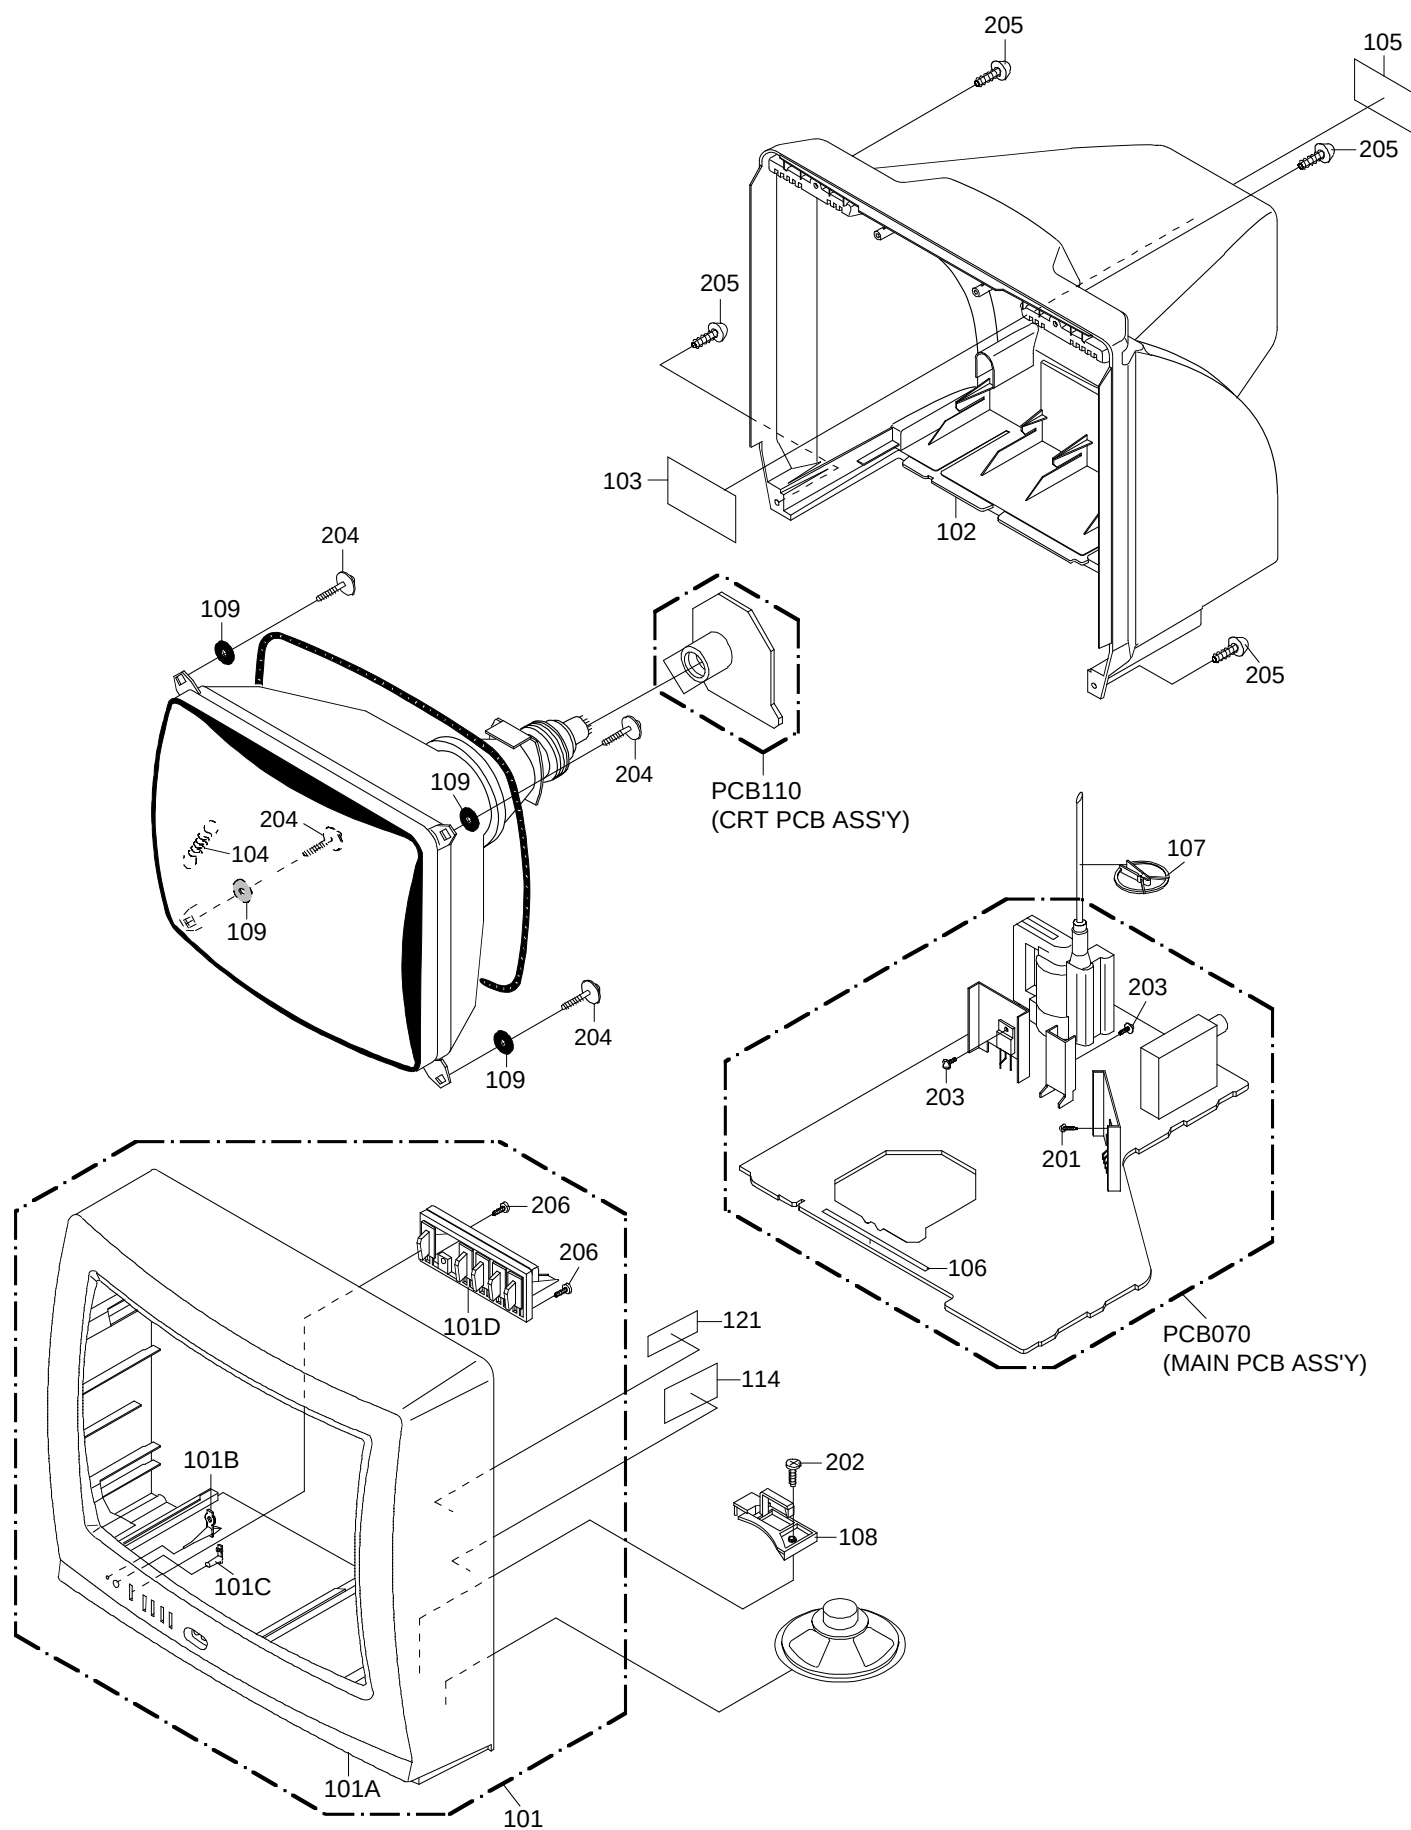

MECHANICAL EXPLODED VIEW (PACKING DIAGRAM)

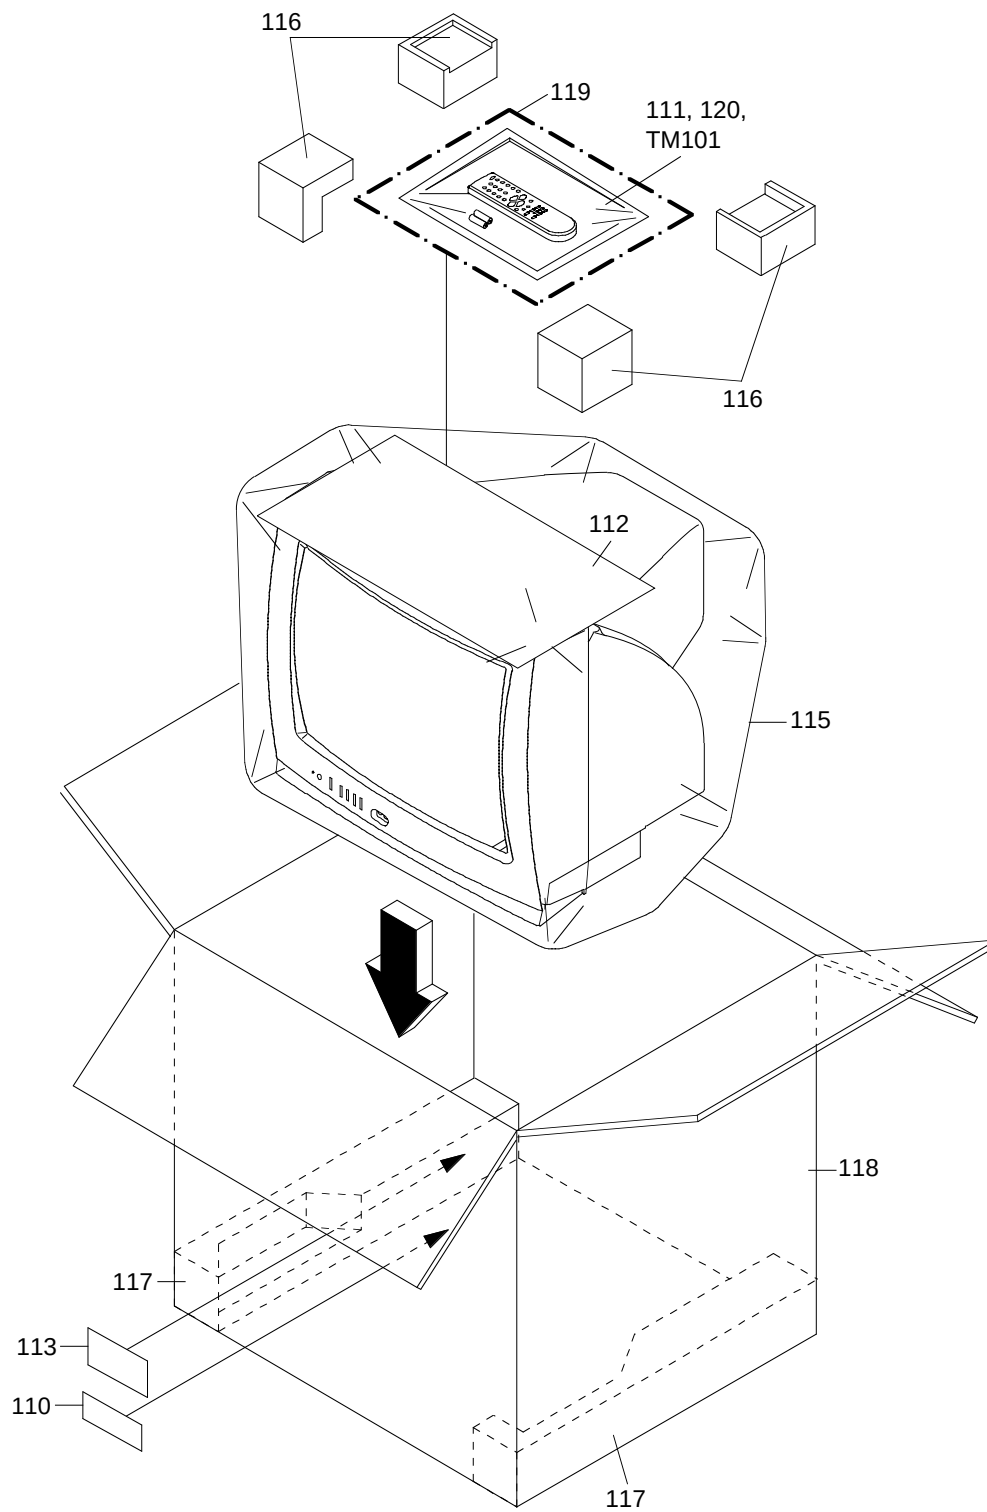

MECHANICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description
101	72795617	7A701A420A	FRONT CABI ASS'Y
101A	72795585	701WPJD025	CABINET FRONT
101B	72795615	713WPAA046	GLASS LED
101C	72795613	713WPAA050	GUIDE REMOCON
101D	72795588	735WPBA980	BUTTON FRAME
102	72784111	A3X302Q740	CABINET,BACK ASSY
103	72783474	726000A032	SHEET CRT SERVICEMAN
104	72795687	741WUA0021	SPRING EARTH
105	72783858	722549A607	SHEET RATING
106	72795622	800WQ0A110	FELT SHEET
107	72794734	899HV3T000	HOLDER ANODE WIRE
108	72795611	735WPAA938	HOLDER SPEAKER
109	72783235	800WR0A010	SHEET CRT SUPPORT (D)
110	72798549	7230007398	SECURITY TAG
111	72783511	J3X00221A	INSTRUCTION BOOK(E/F)
112	72795703	791WHAA134	LIGHTRON SHEET
113	72783861	723000D330	SHEET BARCODE
114	72795594	722000A267	SHEET CSA WARNING
115	72795621	791WHAA126	FILM BAG
116	72783479	792WHAA204	PACKAGE TOP
117	72798723	792WHAA055	PACKAGE BOTTOM
118	72783866	793WCDD176	GIFT BOX
119	72783512	A3X002V975	INSTRUCTION BOOK KIT
120	72795599	JB5ND100	POLYBAG INSTRUCTION(RED CAUTION)
121	72795593	722000A023	SHEET HWC
201	72798786	810763080U	SCREW TAP TITE(S) BRAZIER 3*8 CH
202	72798791	8110630A0U	SCREW TAP TITE(P) BRAZIER 3*10 CH
203	72781255	8109I3080U	SCREW TAP TITE(B) WH7 3*8 CH
204	72781294	8160H50B8U	SCREW TAP TITE(P) W5*28CH FLAT
205	72781279	8117540A6U	SCREW TAP TITE(B0) TRUSS 4*16 CH
206	72781272	8110630A2U	SCREW TAP TITE(P) BRAZIER 3*12 CH

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description
RESISTORS			
△R407	72797796	R002T23R9J	RC 3.9 OHM 1/2W
△R408	72796016	R4X5T6103F	R,METAL 10K OHM 1/6W
△R409	72797966	R4X5T6563F	R,METAL 56K OHM 1/6W
△R429	72795521	R638813R9J	R,FUSE 3.9 OHM 1W
△R447	72781689	R3K58A151J	R,METAL OXIDE 150 OHM 2W
△R500	72794631	R0G3K2275K	RC 2.7M OHM 1/2W
△R501	72795522	R5X2CD3R3J	R,CEMENT 3.3 OHM 5W
△R514	72794633	R63881R22J	R,FUSE 0.22 OHM 1W
△R517	72797849	R3X1812R7J	R,METAL OXIDE 2.7 OHM 1W
△R518	72795514	R4X5T6562F	R,METAL 5.6K OHM 1/6W
△R525	72797898	R3X28A010J	R,METAL OXIDE 1 OHM 2W
△R538	72795500	R002T2155J	RC 1.5M OHM 1/2W
△R542	72781684	R3K581R47J	R,METAL OXIDE 0.47 OHM 1W
△R629	72781701	R3K58B220J	R,METAL OXIDE 22 OHM 3W
△R803	72781688	R3K58A123J	R,METAL OXIDE 12K OHM 2W
△R805	72781688	R3K58A123J	R,METAL OXIDE 12K OHM 2W
△R807	72781688	R3K58A123J	R,METAL OXIDE 12K OHM 2W
CAPACITORS			
△C418	72795628	E02LT3471M	CE 470 UF 25V
△C434	72794396	E02LU8220M	CE 22 UF 100V
C437	72795565	P4J7F3334J	CMPP 0.33 UF 250V PMS
△C443	72783482	P4G8FJ722H	CMPP 0.0072UF 1.25KV PHE
△C446	72794379	E02LU5220M	CE 22 UF 50V
△C447	72794416	E02LU5010M	CE 1 UF 50V
C448	72796351	E02LTD220M	CE 22 UF 250V
△C503	72795629	C0JTB0513K	CC 0.001 UF 500V B
△C505	72794401	P2122B334M	CMP 0.33 UF 275V ECQUL
△C508	72795579	CD39E0MQ3M	CC 0.0047UF 250V
△C514	72795580	C0PLRR7W2K	CC 820 PF 2KV RR
△C515	72794425	E02LT2102M	CE 1000 UF 16V
△C517	72795580	C0PLRR7W2K	CC 820 PF 2KV RR
△C518	72796329	C0JTB05Q2K	CC 470 PF 500V B
△C519	72794425	E02LT2102M	CE 1000 UF 16V
△C521	72794411	E62NFC221M	CE 220 UF 200V
△C526	72797379	E02LFC221M	CE 220 UF 200V
C819	72795578	C0JBB0713K	CC 0.001 UF 2KV B
DIODES			
D001	72794465	D97U03301B	DIODE,ZENER MTZJ33B T-77
D106	72795529	0021721150	LED SLR-342VCT32
D403	72783209	D2MXN40020	DIODE,FAST RECOVERY 1N4002-PAN
D404	72794490	D97U06R21B	DIODE,ZENER MTZJ6.2B T-77
△D405	72795543	D2MXN49370	DIODE,FAST RECOVERY 1N4937-PAN
D406	72783209	D2MXN40020	DIODE,FAST RECOVERY 1N4002-PAN
D408	72783209	D2MXN40020	DIODE,FAST RECOVERY 1N4002-PAN
D409	72794488	D2WT011E10	DIODE,SILICON 11E1-EIC
△D410	72794472	D2WTAU02A0	DIODE,SILICON AU02A-EIC
△D411	72794472	D2WTAU02A0	DIODE,SILICON AU02A-EIC
△D412	72794469	D97U05R11B	DIODE,ZENER MTZJ5.1B T-77
△D501	72795626	D2WXXN40050	DIODE,SILICON 1N4005-EIC
△D502	72795626	D2WXXN40050	DIODE,SILICON 1N4005-EIC
△D503	72795626	D2WXXN40050	DIODE,SILICON 1N4005-EIC
△D504	72795626	D2WXXN40050	DIODE,SILICON 1N4005-EIC
△D505	72794480	D28T21DQN9	DIODE,SCHOTTKY 21DQ09N-TA2B1
D506	72795541	D97U01801B	DIODE,ZENER MTZJ18B T-77
D507	72794468	D97U02R21B	DIODE,ZENER MTZJ2.2B T-77
D508	72794491	D1VT001330	DIODE,SILICON 1SS133T-77
△D509	72795541	D97U01801B	DIODE,ZENER MTZJ18B T-77
△D510	72795545	D2WXR2AM0	DIODE,SILICON RU2AM-EIC
△D512	72794491	D1VT001330	DIODE,SILICON 1SS133T-77
△D513	72794480	D28T21DQN9	DIODE,SCHOTTKY 21DQ09N-TA2B1
D514	72794491	D1VT001330	DIODE,SILICON 1SS133T-77
D515	72794491	D1VT001330	DIODE,SILICON 1SS133T-77
△D516	72795543	D2MXN49370	DIODE,FAST RECOVERY 1N4937-PAN
D517	72794491	D1VT001330	DIODE,SILICON 1SS133T-77
D521	72783210	D9WU01002B	DIODE,ZENER MTZJ10B-EIC
D522	72794491	D1VT001330	DIODE,SILICON 1SS133T-77
D525	72797336	D97U03R61B	DIODE,ZENER MTZJ3.6B T-77
D528	72794489	D97U05R61B	DIODE,ZENER MTZJ5.6B T-77
D602	72794481	D97U09R11B	DIODE,ZENER MTZJ9.1B T-77
D603	72794491	D1VT001330	DIODE,SILICON 1SS133T-77
D604	72794486	D97U08R21B	DIODE,ZENER MTZJ8.2B T-77
D606	72794488	D2WT011E10	DIODE,SILICON 11E1-EIC
D611	72794487	D97U01201B	DIODE,ZENER MTZJ12B T-77
ICS			
IC101	72795532	I56F07091C	IC OEC7091C

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
ICS				
IC199	72783483	A3X301Q075	INIT DATA	BR24L02F-WE2
△IC401	72783444	I0WTD9302B	IC	STV9302B
△IC501	72794512	000220002W	PHOTO COUPLER	PS2561AL1-1-V(W)
△IC1001	72795537	I01DP75110	IC	
TRANSISTORS				
Q105	72795555	TPATB03003	COMPOUND TRANSISTOR	KRA102MAT
△Q401	72795478	TC1G058850	TRANSISTOR,SILICON	2SC5885
△Q402	72795480	TC5T01627Y	TRANSISTOR,SILICON	2SC1627_Y(TPE2)
△Q501	72795539	T25F035630	FET	2SK3563(ORION_Q)
△Q502	72794577	TCATC31980	TRANSISTOR,SILICON	KTC3198-AT(Y,GR)
△Q503	72794569	TA3T016240	TRANSISTOR,SILICON	2SA1624-AA
Q505	72795970	T6YJ1037K0	TRANSISTOR,SILICON	2SA1037AKT146R,S
Q506	72794560	T8YJ2412K0	TRANSISTOR,SILICON	2SC2412KT146 R,S
Q507	72794577	TCATC31980	TRANSISTOR,SILICON	KTC3198-AT(Y,GR)
Q601	72795476	TCAT032034	TRANSISTOR,SILICON	KTC3203_Y-AT
Q602	72795476	TCAT032034	TRANSISTOR,SILICON	KTC3203_Y-AT
Q603	72795476	TCAT032034	TRANSISTOR,SILICON	KTC3203_Y-AT
Q606	72795476	TCAT032034	TRANSISTOR,SILICON	KTC3203_Y-AT
Q607	72794560	T8YJ2412K0	TRANSISTOR,SILICON	2SC2412KT146 R,S
△Q801	72794574	TCA0042170	TRANSISTOR,SILICON	KTC4217(O,Y)
△Q802	72794574	TCA0042170	TRANSISTOR,SILICON	KTC4217(O,Y)
△Q803	72794574	TCA0042170	TRANSISTOR,SILICON	KTC4217(O,Y)
COILS & TRANSFORMERS				
L001	72796518	02167F3R3J	COIL	3.3 UH
L401	72795560	021L75472J	COIL	4.7 MH
△L501	72798941	0293000130	COIL,LINE FILTER	ELF15N010AP
△L503	72783484	028R200031	COIL,DEGAUSS	8R200031
L801	72795941	021673101K	COIL	100 UH
T401	72796466	045011001L	TRANS,HORIZONTAL DRIVE	STP-03Q24
△T502	72795483	048129109S	TRANSFORMER,SWITCHING	8129109S
JACKS				
J702	72795495	060Q401112	RCA JACK	AV1-09AD-3
J703	72795494	060Q401111	RCA JACK	AV1-09AD-4
△J801	72783271	066F120020	SOCKET,CATHODE RAY TUBE	ISMP01S
SWITCHES				
SW101	72794688	0504101T34	SWITCH,TACT	EVQ21505R
SW102	72794688	0504101T34	SWITCH,TACT	EVQ21505R
SW103	72794688	0504101T34	SWITCH,TACT	EVQ21505R
SW104	72794688	0504101T34	SWITCH,TACT	EVQ21505R
SW105	72794688	0504101T34	SWITCH,TACT	EVQ21505R
P.C.BOARD ASSEMBLIES				
PCB070	72783485	A3X301Q070L	PCB ASS'Y	CMF081B
PCB110	72783486	A3X301Q110L	PCB ASS'Y	CCF073B
MISCELLANEOUS				
B501	72794357	024HT03553	CORE,BEADS	W5RH3.5X5X1.0
B504	72794357	024HT03553	CORE,BEADS	W5RH3.5X5X1.0
BT001	72799278	141R004016	BATTERY,MANGAN	GR03X-SP2
BT002	72799278	141R004016	BATTERY,MANGAN	GR03X-SP2
△CD501	72795554	1209414909	CORD,AC BUSH	9414909
CD801	72794460	06CH823004	CORD,CONNECTOR	CH823004
△CP401	72796822	069S450089	CONNECTOR PCB SIDE	A1561WV2-A5P
△CP502	72796821	069S420110	CONNECTOR PCB SIDE	A1561WV2-2P
CP503	72796825	069W01001A	CONNECTOR PCB SIDE	003P-2100
CP601	72799047	069S260639	CONNECTOR PCB SIDE	A2001WR2-6P
CP801	72796816	069S320010	CONNECTOR PCB SIDE	A2361WV2-2P
CD101A	72783487	06CH013209	CORD,CONNECTOR	CH013209
CD101B	72783488	06CH013208	CORD,CONNECTOR	CH013208
CP802A	72796751	067U005049	WIRE HOLDER	B2013H02-5P
CP802B	72796751	067U005049	WIRE HOLDER	B2013H02-5P
CP803A	72796750	067U004029	WIRE HOLDER	B2013H02-4P
CP803B	72796750	067U004029	WIRE HOLDER	B2013H02-4P
EL001	72797070	124120301A	EYE LET	XRY20X30BD
EL002	72797069	124116281A	EYE LET	XRY16X28BD
△F501	72795538	081PC04005	FUSE	51MS040L
△FB401	72795484	043220061F	TRANSFORMER,FLYBACK	FQI20B103_M
FH501	72794496	06710T0009	HOLDER,FUSE	EYF-52BCY
FH502	72794496	06710T0009	HOLDER,FUSE	EYF-52BCY
OS101	72783489	077A000027	REMOTE RECEIVER	ROM-V3138SY
△RY501	72796047	0560V20115	RELAY	ALKS321
S101	72798397	WBL6034038	FLAT CABLE AWM2468 A	WG26 4C BLACK 340MM
S102	72798402	WCL6848038	FLAT CABLE AWM2468 A	WG26 5C GRAY 480MM
△SP1001	72795488	070Y132027	SPEAKER	S08F21A
△TH501	72794693	D8EE0B1400	DEGAUSS ELEMENT	B59F203-S1060-B14
TM101	72795473	076N0EH050	TRANSMITTER	RC-EH050(CT-859)
△TU001	72783421	0163300022	RF UNIT	115-V-KA35ARH

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
MISCELLANEOUS				
△V801	72796977	098Q200490	CRT W/DY	A48AKH13X04
X601	72783450	100BT3R537	CRYSTAL	HC-49U
RESISTOR				
	RC.....	CARBON RESISTOR		
CAPACITORS				
	CC.....	CERAMIC CAPACITOR		
	CE.....	ALUMI ELECTROLYTIC CAPACITOR		
	CP.....	POLYESTER CAPACITOR		
	CPP.....	POLYPROPYLENE CAPACITOR		
	CPL.....	PLASTIC CAPACITOR		
	CMP.....	METAL POLYESTER CAPACITOR		
	CMPL.....	METAL PLASTIC CAPACITOR		
	CMPP.....	METAL POLYPROPYLENE CAPACITOR		

TOSHIBA CORPORATION

1-1, SHIBAURA 1-CHOME, MINATO-KU, TOKYO 105-8001, JAPAN